



A PRELIMINARY INVESTIGATION FOR PROPOSED ROAD CONSTRUCTION PROJECT USING GRAVITY SURVEY METHOD OF GEOPHYSICAL INVESTIGATION IN IGBEYIN-ADUN AREA 1 SUBURB OF IBEJU-LEKKI SOUTH-WEST NIGERIA

Ishola S. A

Department of Earth Sciences, Olabisi Onabanjo University Ago-Iwoye, P.M.B 2002, Ago-Iwoye, Ogun State, Nigeria

Corresponding Author: [*ishola.sakirudeen@oouagoiwoye.edu.ng](mailto:ishola.sakirudeen@oouagoiwoye.edu.ng)

Keywords: Bouguer, Autograv meter, Compaction, Cycle, Residual, Anomalous

ABSTRACT: Gravity method of geophysical investigation was utilized in acquiring gravity anomaly data aimed at investigating gravity variations in relation to subsurface geological conditions for proposed road construction project in Igbeyin-Adun Area 1 suburb of Ibeju-Lekki, South-West Nigeria. CG-5 Autograv meter was employed for the acquisition of field data. Nine gravity stations were occupied, the first reading was taken at the base station and at one-hour interval, then readings were taken at the base station and also consecutive readings were taken from different points at every 5m distance in a 40m profile along a traverse line against time. In the course of the field operation, four cycles each were adopted for four minutes to achieve four different readings which are indicated as N1, N2, N3 and N4 with the end of N4 assigned as the last reading taken at the base station. The data were inputted in Microsoft Excel format and consequently processed, plotted and interpreted. The bouguer and residual anomaly plots were used to indicate locations of low and high gravity anomaly along the five (5) traverses which were used for the ascertaining the locations of high and low densities and their corresponding subsurface litho-structures. Gravity changes were observed at different lateral extent at each base station. The gravity readings of the study area scanning from N1 to N4 produced the following outputs. The geometry of the subsurface structural variations was determined from the interpretation of the anomaly data. The transverse section (T1 to T6) revealed a gravity profile of a total length 30 m, 40m, 35m, 40m, 35m and 20m respectively with station spacing of 5m. the residual anomaly profile shows major anomalous regions which occur at lateral distance between 5m to 17 m and 17m to 25m (T1), 22m to 32m and 32m to 40m (T2), 3.5m to 15 m, 13m to 19m and 22.5m to 35m (T3), 0m to 40 m (T4), 1m to 9 m (T5), and 1m to 8.5m (T6) with gravity value of 42000 and -30000 mGal in T1, 1400 and -1800 mGal in T2, -2100, -600 and 1400 mGal in T3, 700 to 1500 mGal in T4, 12200 mGal in T5 and 1.3 mGal in T6 respectively for all the transverse lines and these anomalous zones are indicative of low-density and high-density body in T1, low-density and high-density body in T2, low-density and high-density body in T3, high-density body in T4, high-density body in T5 and a low density body in T6 which could represent possible buried objects within the study area. The results conclusively delineated the study area has a high-density bodies and low-density body. The detected and delineated anomalous zones were indicative of low-density body that could possibly represent the presence of metallic deposits/buried utilities; are of low strength could cause road failure in the area except appropriate geotechnical measures are integrated on the subsurface materials in the affected area for compaction and stabilization.

Ishola S. A



1.0 Introduction

Road infrastructures have been essential prerequisites for communication, social integration and economic developments (Akindele, 2015). Roads account for more than 90% of the movement of the people, goods and services, road network are essential for national security. Roads transport gain popularity due to its ability to provide accessibility through door-to-door services and its suitability for short haulage of passengers and freight (Owolabi, 2012). Road's transport is the most affordable and efficient means of transport to majority of people as other modes of transportation are either expensive relatively underdeveloped, thus resulting to rise in construction of roads. Consequently, there is an excessive axle loads which could be attributable to growth in traffic. These excessive loads could induce substantial amount of stress on the road resulting to failures or distresses (Owolabi, 2012).

Road failures are discontinuity in a road pavement resulting in cracks, potholes, bulges and depression (Aigbedion, 2017). According to the Federal Ministry of Works and Housing (FMWH, 1997); failed roads are often characterized by potholes, polishing/pavement surface wash, block and longitudinal cracks, depression/sinking of roadways, drainage collapse, over flooding of the carriageway, gullies and trenches and rutting and ravelings. Failures of highway pavement are a major experience which occurs on Nigeria roads (Osuolale *et al.*, 2012; FRN, 1992). The failure of

highway pavement is dated back to the colonial period (Ebuzuone, 2015). These features have been attributed to some factors such as properties of construction materials, sub-grade condition, environmental conditions, traffic condition, traffic loadings, lack of drainage and poor workmanship (Jegede, 2014; Madedor, 1992; Ogundipe, 2008). Occurrence of these failures is a major problem to both motorist and pedestrians as these failures could contribute significantly to loss of lives, properties and human injuries through accidents, impedance of human movement, and flow of economic activities, encouragement of armed robbers along affected regions, environmental pollution and degradation and a host of other consequences. Past investigations in the field of geosciences have also highlighted the roles of gravity method of geophysical investigation as a significant factor responsible for unending road failures in parts of Nigeria (Salami *et al.*, 2012; Adeyemi, 2013). Igbeyin-Adun Area 1 is a suburb within Ibeju Lekki in Eti-Osa Local Government Area of Lagos State. It serves as one of the notable areas that have been identified as feeder road linking the popular Lekki-Ajah-Epe express road making it a potential site for proposed road construction project in the zone. The road after construction should serve as access route to Dangote refinery at Epe. The congested states of the aforementioned express road have over time slowed down the pace of vehicular motion which in-turn has negatively affected the socio-



economic development and commercial activities in and around the area and the suburbs in entire Ibeju-Lekki. Therefore, it is necessary to ascertain the principal factor responsible for the occurrence of road failure before embarking on the proposed project as this will serve as an aid in predicting possible causes and adopting precautionary measures thereby saving time, energy, resources and above all human lives. The gravity method is a basic geophysical technique often utilized for the purpose of exploration and characterization of subsurface structures most strikingly adopted in mineral, petroleum exploration and foundational engineering (Telford *et al.*, 1990). It involves the measurement of the variations in the Earth's gravitational field, which are caused by density contrasts between subsurface rocks and mineral deposits (Lowrie, 2007). The variations in density are indicative of subsurface geological structures, such as faults, fractures, and mineral deposits.

The output of the application of gravity technique provides information for better detection subsurface structural features while the corresponding interpretation of the same possesses the potential of constraining quantitative details and reducing the ambiguity of observed geological features. The effectiveness of gravity survey is dependent on the existence of a significant density contrast between altered rocks or structures and their host geologic material. Gravity method has been proven to be a non-destructive geophysical

method that measures the difference in the Earth's gravitational field at definite locations and from one location to the other with reference to the base station. Gravity surveys can be carried out on the earth's surface as ground gravity survey as well as in the air professionally known as "aero-gravity or airborne-gravity survey", or at sea as "marine-gravity survey.

Gravity anomalies can be caused by various subsurface features such as density variations (Differences in rock density, such as between sedimentary and basement rocks), Structural features such as faults, folds, and fractures that disrupt the subsurface density distribution. Mineral deposits and underground cavities such as empty spaces like caves, tunnels, or voids can also cause gravity anomalies. The significance of gravity investigation is based on identification and description of subsurface structures from the observed gravity effects caused by their anomalous densities in the field (Telford *et al.*, 1990; Lowrie, 2007). Gravity interpretations are aimed at delineating the subsurface litho-structures and associated features such as amplitude, shape, density contrast, frequency and closure of the gravity anomalies from bouguer anomaly, residual and regional maps/profiles and numerous enhancement maps (Okpoli *et al.*, 2019). The objective of this study is to determine to a significant extent the area of gravity anomaly due to low density concentration as a predictive measure of geophysical prospecting so as to ascertain the

suitability of the area for the proposed road project because low density value is a potential factor for persistence experience of road failure (Olofinyo *et al.*, 2019).

2.0 Study Area

2.1 Location and Accessibility

The study area is the Igbeyin-Adun 10f Ibeju-Lekki, Southwest Nigeria (Figure 1.1) within the Dahomey Basin. It is located between longitude

3° 52'31" to 3° 52' 32" East and latitude 6° 26' 29" to 6° 26' 31" North in the creek zone of tropical Southwestern Nigeria. The study area has a gentle topography, with elevations ranging from 50 to 200 meters above sea level. The study area is accessible by road, with major roads connecting to nearby towns and cities. The terrain is relatively flat, making it suitable for gravity surveying (Figure 1.1).

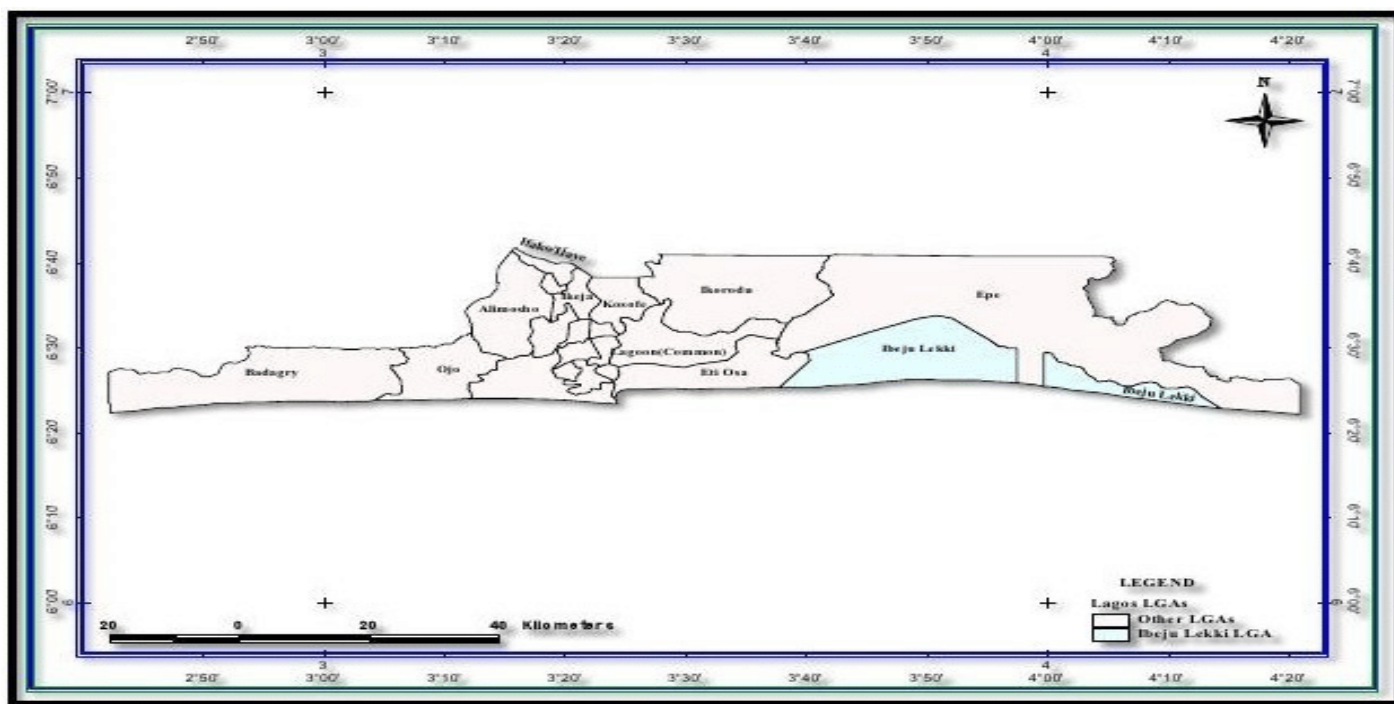


Fig. 1.1: Geographical Map of Lagos State showing Ibeju-Lekki

2.2 Relief and Drainage

The relief of the study area is very unique having both gentle and steep slope, and is made up

of coastal plains, lagoon, water bodies, sand dunes, elevated areas and flood plains. The drainage system of the State is characterized by a maze of lagoons and waterways which constitute about 22 percent of 787 sq. kms



(75,755 hectares) of the State total landmass. The major water bodies are the Lagos and Lekki Lagoons, Yewa and Ogun Rivers. Others are Ologe Lagoon, Kuramo Waters, Badagry, Five Cowries and Omu.

2.3 Climate and Vegetation

Igbeyin-Adun Area 1 experiences a tropical monsoon climate, characterized by two distinct seasons. Two dry seasons are also experienced annually, with the major dry season varying from February to April and minor dry spells varying between 20° and 37°C. February to April is the major month with peak temperature records in the study area. The wet season, from April to October, brings high rainfall, high humidity, and warm temperatures. In contrast, the dry season, from November to March, is marked by low rainfall, low humidity, and warm temperatures and typically receives about 135.64 mm (5.34 inches) of precipitation and has 198.96 rainy days (54.51% of the time) annually., with temperatures ranging from 22-32°C and relative humidity between 60-90% which is persistently high and most times rarely goes below 70 percent throughout the year along the Lagos coast. Ibeju Lekki is situated within the tropical rainforest ecosystem, featuring diverse vegetation types. The area boasts primary rainforest, secondary rainforest, swamp forest, and mangrove forest. Plants found in the reserve include a variety of flowering plants, ferns, lianas, vines, epiphytes, grasses and palms.

2.4 Geology of the Study Area

Ibeju-Lekki covers 445km² which equals 25% of the total landmass of Lagos state. It falls between longitudes 3°35'N and 3°55'N and Latitudes 6°25'E and 6°45'E in the creek zone of tropical Southwestern Nigeria. The area is relatively flat with an altitude of about 6.40m. It is bounded by the north by Lagos and Lekki lagoons, and to the south by the Atlantic Ocean. Ibeju-Lekki and its environs constitute part of the extensive barrier-lagoon complex in the costal margin of Southwestern Nigeria. This barrier-lagoon system is composed of five physiographic units which are broadly equivalent to sedimentary sub-environments. The units are beaches and small barrier islands, channels and creeks, open lagoons, small deltas built into lagoons, and swamps bordering the lagoons. The climate of the study area is tropical wet and dry seasons. The regional geology of Nigeria is embedded within the Pan-African mobile belt. This belt is believed to have separated Congo from West Africa Cratons (Adagunodo *et al.*, 2018). It forms part of the Lagos Lagoon system known as the largest of the four Lagoon systems of the Gulf of Guinea Coast (Adepelumi and Olorunfemi, 2000). Geologically, the study area is a sedimentary basin that falls within the coastal plain sands of the Benin Formation, which was overlain by alluvial deposits as displayed in Figure 2.1. Stratigraphy of the Eastern Benin Basin has been discussed by various workers and several classification schemes have been proposed.

These notably include those of Obaje *et al.*, 2006 and Billman (1992). Deposition of the Cretaceous sequence in the eastern Dahomey basin began with the Abeokuta Group, consisting of the Ise, Afowo, and Araromi Formations. Tertiary sequence includes Ewekoro, Akinbo, Oshosun, Ilaro, and coastal plain sands (Benin) Formations (Obaje *et al.*, 2006). The Quaternary sequence in the Dahomey basin is the Coastal Plain Sands and recent littoral alluvium which consists of poorly sorted sands with lenses of clays. The sands are in parts cross-bedded and display continental characteristics (Durotoye, 1975). However, litho-stratigraphic information from boreholes in and around Lekki-Ikoyi area reveals that

typical stratigraphy sections consist of unconsolidated dry and wet sand and organic clay deposits. The deposits are sometimes inter-bedded in places with sandy-clay or clayey sand and mud with occasional varying proportion of vegetable remains and peat. The environment of deposition of these sediments was suggested to be near-shore littoral and lagoon (Longe *et al.*, 1987). Within the Dahomey basin, the shallow coastal aquifer is vulnerable to climate change's impact on groundwater quality. Analysis of imagery from Google Earth and other sources has revealed shoreline changes and coastal erosion in the area. Ibeju-Lekki has significant groundwater resources stored in shallow and deep

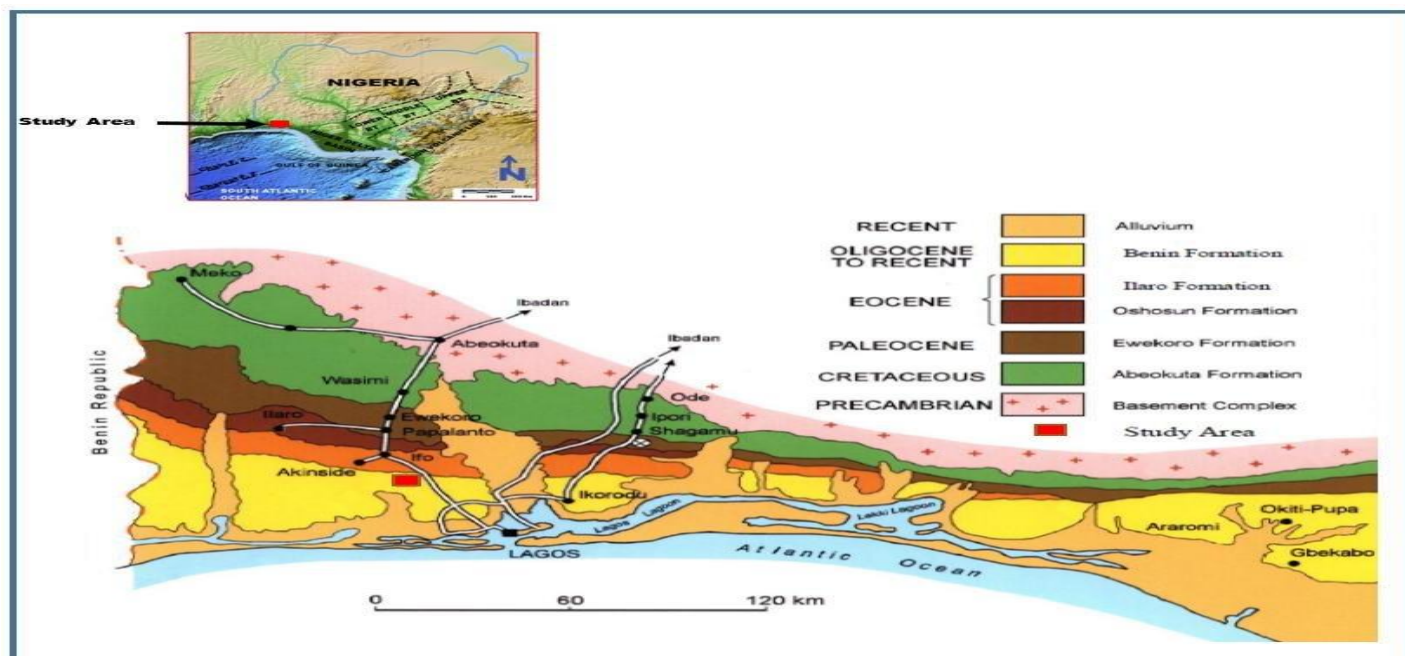


Figure 2.1: Stratigraphic of Eastern Dahomey Basin Southwestern Nigeria (Bakare *et al.*, 2019)



3.0 Materials and Methods

3.1 Theoretical Background

In any point on the earth, gravity acts in a direction normal to a surface on which the potential of gravity is constant. This equipotential surface is the best-fitting geometric figure to mean sea-level on the earth. Its shape is that of a slightly flattened spheroid for which the radius at any point can be computed. The potential gravity on this spheroid called geopotential is computed by combining the gravitational potential and the potential of the centrifugal acceleration due to earth’s rotation. Gravity measurements are conducted with a high degree of accuracy and similar accuracy must be attained in order to compute a theoretical value of gravity for comparison at any latitude. Therefore, each step in computing the formula for the reference gravity must be consequently carried out to second order in the flattening f and related parameters.

When considering the ellipticity of the earth’s figure, it is significant for every cross-section of earth’s spheroidal shape that includes both poles to be an identical ellipse with equatorial semi-major axis a and polar semi-minor axis c which are related by flattening f through the equation

$c = a (1 - f)$3.1

in Cartesian co-ordinates, the equation of the ellipse is

$\frac{x^2}{a^2} + \frac{z^2}{c^2} = 1$ 3.2

Where a position on the reference spheroid is specified by the polar angle, θ and radius r defined relative to the axis of rotational symmetry and centre of the spheroid respectively (Fig 3.1). If we are to consider a polar crosssection that includes the x and z axes so that $x = r \cos \theta$ by substituting into equation 3.2, we simply obtain the equation of the elliptical section in polar coordinates (Lowrie, 2011).

$\frac{r^2 \sin^2 \theta}{a^2} + \frac{r^2 \cos^2 \theta}{c^2} = 1$ 3.3

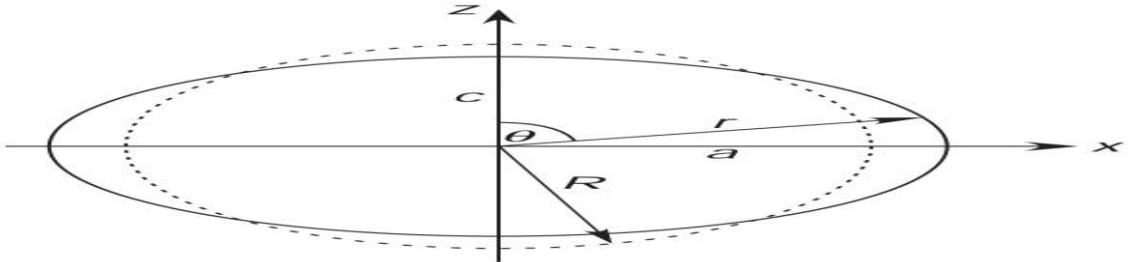


Fig. 3.1: Polar cross-section of a spheroid with principal axes a and c ($c < a$), compared with a sphere (dashed) with radius R and the same volume as spheroid (Lowrie, 2011).



$$\frac{r^2}{a^2} (\sin^2 \theta + \frac{\cos^2 \theta}{(1-f)^2}) = 1 \dots\dots\dots 3.4$$

Slight rearrangement turned equation 3.4 to equation 3.5 where;

$$r^2 = \frac{a^2(1-f)^2}{\cos^2 \theta + (1-f) \sin^2 \theta^2} \dots\dots\dots 3.5$$

The expansion of the denominator in equation 3.5 gives

$$\begin{aligned} &\cos^2 \theta + (1-f) \sin^2 \theta^2 \\ &= (1-2f+f^2) \sin^2 \theta + \cos^2 \theta \\ &= \sin^2 \theta + \cos^2 \theta - 2f \sin^2 \theta + f^2 \sin^2 \theta \dots\dots\dots 3.6 \end{aligned}$$

It is worthy of note that $\sin^2 \theta + \cos^2 \theta = 1$. Thus, equation 3.6 can be re-written as

$$\begin{aligned} &= 1 - 2f \sin^2 \theta + f^2 \sin^2 \theta (1) \\ &= 1 - 2f \sin^2 \theta + f^2 \sin^2 \theta (\sin^2 \theta + \cos^2 \theta) \\ &= 1 - 2f \sin^2 \theta + f^2 \sin^4 \theta + f^2 \sin^2 \theta \cos^2 \theta \\ &= (1 - f \sin^2 \theta)^2 + f^2 \sin^2 \theta \cos^2 \theta \dots\dots\dots 3.7 \end{aligned}$$

By substituting this back to equation 3.5 and taking the square root afterwards, we obtain a representative equation for radius

$$\begin{aligned} r^2 &= \frac{a^2(1-f)^2}{\sqrt{(1-f \sin^2 \theta)^2 + f^2 \sin^2 \theta \cos^2 \theta}} \\ \frac{r}{a} &= \frac{1-f}{((1-f \sin^2 \theta)^2 + f^2 \sin^2 \theta \cos^2 \theta)^{\frac{1}{2}}} \\ \frac{r}{a} &= \frac{1-f}{1-f \sin^2 \theta} \left(1 + \left(\frac{f^2 \sin^2 \theta \cos^2 \theta}{(1-f \sin^2 \theta)^2}\right)^{\frac{-1}{2}}\right) \dots\dots\dots 3.8 \end{aligned}$$

Applying the binomial theorem twice to the last line and expanding to order f^2 , we obtain an equation for the surface of a spheroid.

$$\begin{aligned} \frac{r}{a} &\approx \frac{1-f}{1-f \sin^2 \theta} \left(1 - \frac{1}{2} f^2 \sin^2 \theta \cos^2 \theta\right) \\ \frac{r}{a} &\approx \frac{1-f}{1-f \sin^2 \theta} \dots\dots\dots 3.9 \end{aligned}$$

The expansions for the gravitational potential and for gravity on the reference ellipsoid require the ratio a/r . If the equation 3.9 is inverted with the aid of the binomial expansion, we simply obtain to an order f^2 .

$$\begin{aligned} \frac{a}{r} &\approx \frac{1-f \sin^2 \theta}{1-f} \left(1 + \frac{1}{2} f^2 \sin^2 \theta \cos^2 \theta\right) \\ \frac{a}{r} &\approx (1 - f \sin^2 \theta) \left(1 + \frac{1}{2} f^2 \sin^2 \theta \cos^2 \theta\right) (1 + f + f^2 + \dots\dots\dots) \\ \frac{a}{r} &\approx 1 + f + f^2 - f \sin^2 \theta - f^2 \sin^2 \theta + \frac{1}{2} f^2 \sin^2 \theta \cos^2 \theta \dots\dots\dots 3.10 \end{aligned}$$

$$\frac{a}{r} \approx 1 + f \cos^2 \theta + f^2 \cos^2 \theta + \frac{1}{2} f^2 \cos^2 \theta - \frac{1}{2} f^2 \cos^4 \theta$$

$$\frac{a}{r} \approx 1 + f \left(1 + \frac{3}{2} f \right) \cos^2 \theta - \frac{1}{2} f^2 \cos^4 \theta \dots \dots \dots 3.11$$

The main component of gravity is the gravitational acceleration a_G towards the centre of the earth. Gravitational acceleration varies with latitude because of the varying radius of the spheroid. The departure from a spherical shape result from the deforming effect of earth's rotation which produces a centrifugal acceleration a_c which is directed perpendicular to and away from axis of rotation (Fig. 3.2). This component is proportional to the distance from the rotation axis, so it equally varies with latitude (Lowrie, 2011).

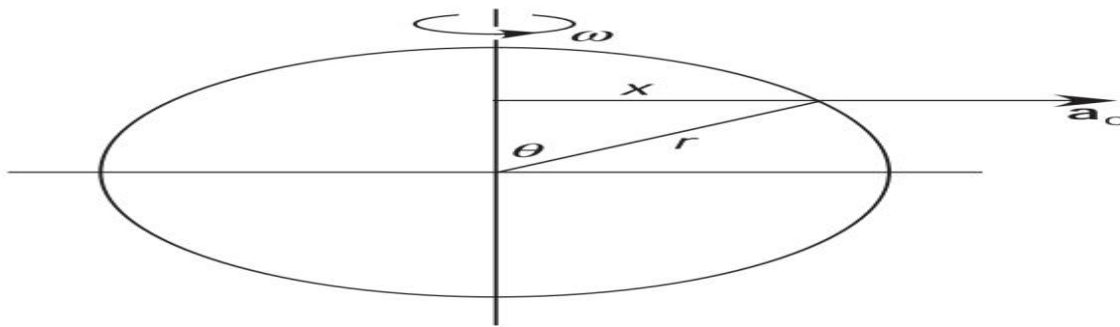


Fig. 3.2: Centrifugal acceleration a_c at co-latitude θ , directed perpendicular to and away from the axis of rotation (Lowrie, 2011).

Gravity is the vector combination of the centrifugal and gravitational components each of which is conservative and is the gradient of a scalar potential. Therefore, geopotential is the potential of gravity U_g at a given point on earth's surface; it is mathematically expressed as the sum of the gravitational potential U_G and centrifugal potential U_C at that point

$$U_g = U_G + U_C \dots \dots \dots 3.12$$

The computation of gravity on the reference spheroid necessitates the derivation and determination of geopotential to second order in the small quantities that define it where each of the quantities f , m , and J_2 is around 10^{-3} in

size rendering their squares and products to be around 10^{-6} . The gravitational potential must be determined with the same definition depicting that it is quite inadequate to utilize only the terms up to J_2 . The term J_3 can be omitted if we assume that the mass distribution of the earth is symmetric about the equator but it is required that the term J_4 is included for an accurate description of gravitational potential up to the term J_4 , U_G therefore becomes

$$U_G = - \frac{GE}{a} \left[\left(\frac{a}{r} \right) - J_2 \left(\frac{a}{r} \right)^3 P_2(\cos \theta) - J_4 \left(\frac{a}{r} \right)^5 P_4(\cos \theta) \right] \dots \dots \dots 3.13$$



The centrifugal acceleration a_c is the gradient of the centrifugal potential i.e

$$a_c = -\nabla U_c \quad \text{.....3.14}$$

Let x be the perpendicular distance from the rotation axis to a point on the surface at latitude θ and let ω be the angular rate of rotation of the earth (Fig. 3.2). The centrifugal acceleration is equal to $\omega^2 x$. So, for a constant rate of rotation, U_c varies only with x . Therefore, the above statement is mathematically expressed as

$$-\frac{\partial U_c}{\partial x} = \omega^2 x \quad \text{.....3.15}$$

Integrating both sides with respect to x , we have

$$U_c = -\frac{\omega^2 x^2}{2} + U_0$$

$$U_c = -\frac{1}{2} \omega^2 x^2 + U_0 \quad \text{.....3.16}$$

The implication is that the potential is zero at this axis of rotation where $x = 0$, and the constant of integration $U_c = 0$. The equation for the centrifugal potential in terms of the polar angle θ is

$$U_c = -\frac{1}{2} \omega^2 x^2$$

$$U_c = -\frac{1}{2} \omega^2 r^2 \sin^2 \theta \quad \text{.....3.17}$$

The Equipotential surface of Gravity

In order to compute gravity accurately on the reference ellipsoid, it is necessary to develop the geopotential to second order in the small quantities f, m and J_2 , the gravitational potential coefficient of J_4 whose magnitude is around 10^{-6} must also be utilized. The geopotential

consists of the sum of the gravitational and centrifugal potentials (Lowrie, 2011).

$$U_g = -\frac{GE}{a} \left[\left(\frac{a}{r} \right) - J_2 \left(\frac{a}{r} \right)^3 P_2(\cos \theta) - J_4 \left(\frac{a}{r} \right)^5 P_4(\cos \theta) \right]$$

$$U_g = -\frac{1}{2} \omega^2 a^2 \left(\frac{r}{a} \right)^2 \sin^2 \theta \quad \text{.....3.18}$$

Taking the centrifugal term inside the bracketed expression renders equation 3.18 to be

$$U_g = -\frac{GE}{a} \left[\left(\frac{a}{r} \right) - J_2 \left(\frac{a}{r} \right)^3 P_2(\cos \theta) - J_4 \left(\frac{a}{r} \right)^5 P_4(\cos \theta) + \frac{1}{2} \left(\frac{\omega^2 a^3}{GE} \right) \left(\frac{r}{a} \right)^2 \sin^2 \theta \right] \quad \text{..... 3.19}$$

The geopotential involves the ratio of $\frac{a}{r}$, $\left(\frac{a}{r} \right)^3$, and $\left(\frac{a}{r} \right)^5$ which we can generate from equation 3.11. It should be noted that the term $\left(\frac{a}{r} \right)^3$ is multiplied by J_2 , so it must be evaluated only to first order in f ; the coefficient J_4 is itself of order 10^{-4} , so the ratio $\left(\frac{a}{r} \right)^5$ on the equipotential surface of gravity may be set equal to 1. Then

$$\left(\frac{a}{r} \right) \approx 1 + 3(f(1+\frac{3}{2}f) \cos^2 \theta - \frac{1}{2} f^2 \cos^4 \theta) \approx 1 + 3(f \cos^2 \theta) \quad \text{..... 3.20}$$

For the purpose of succinctness and identification, let the last term in the brackets in equation 3.20 be identified as ψ . The ratio $\frac{r}{a}$ is obtained from equation 3.9. Therefore,

$$\psi = \frac{1}{2} \left(\frac{\omega^2 a^2 (1-f)}{GE} \right) \frac{(1-f) \sin^2 \theta}{(1-f \sin^2 \theta)^2} \quad \text{.....3.21}$$

Ishola S. A



$$\psi = \frac{1}{2} m \frac{(1-f)\sin^2\theta}{(1-f\sin^2\theta)^2} \quad \text{.....3.22}$$

Where m is the centrifugal acceleration ratio given as

$$m = \frac{\omega^2 a^2 (1-f)}{GE} \quad \text{.....3.23}$$

The denominator in equation 3.22 can be further expanded using binomial theorem; this is expected to be in first order only because of the factor m which is similar in size to f. The centrifugal term ψ becomes

$$\psi = \frac{1}{2} m (1-f)(1+2f\sin^2\theta)\sin^2\theta \quad \text{.....3.24}$$

Determining the product of expression of equation 3.24 and retaining only the terms of first order in f given

$$\psi = \frac{1}{2} m (1-f)(1+2f\sin^2\theta)\sin^2\theta \quad \text{.....3.25}$$

In the equation for the geopotential, the centrifugal term must be combined with a term in $J_2 P_2(\cos\theta)$, which has the form $(\cos^2\theta)$ and a term $J_4 P_4(\cos\theta)$, which contains terms in both $\cos^2\theta$ and $\cos^4\theta$ (Lowrie, 2011).

$$\begin{aligned} \psi &= \frac{1}{2} m (1 - \cos^2\theta)(1 - f + 2f)(1 - \cos^2\theta) \\ &= \frac{1}{2} m (1 - \cos^2\theta)(1 - f + 2f)(1 - \cos^2\theta) \\ &= \frac{1}{2} m (1 - \cos^2\theta)(1 - f + 2f)(1 - \cos^2\theta) \\ &= \frac{1}{2} m (1 + f - 2f\cos^2\theta - \cos^2\theta - f\cos^2\theta + 2f\cos^4\theta) \quad \text{.....3.26} \\ &= \frac{1}{2} m (1 + f - (1 + 3f)\cos^2\theta + 2f\cos^4\theta) \quad \text{.....3.27} \end{aligned}$$

Returning back to equation 3.19, we can state the full expressions for $P_2(\cos\theta)$ and $P_4(\cos\theta)$ and the ratios a/r from equation 3.11 and $(a/r)^3$ from equation 3.20 and using equation 3.27 for the centrifugal term, we get the geopotential as a function of $\cos^2\theta$ and $\cos^4\theta$.

$$U_g = - \frac{GE}{a} \left[\begin{aligned} &1 + (1 + \frac{3}{2}f)\cos^2\theta - \frac{1}{2}f^2\cos^4\theta \\ &-J_2(-1 + 3(1-f)\cos^2\theta + \frac{9}{2}f\cos^4\theta) \\ &-J_4(3 - 30\cos^2\theta + 35\cos^4\theta) \\ &+ \frac{1}{2}m(1+f - (1+3f)\cos^2\theta + 2f\cos^4\theta) \end{aligned} \right] \quad \text{.....3.28}$$

After gathering terms to get the coefficients that multiply $\cos^2\theta$ and $\cos^4\theta$, we get the final expression for the geopotentials (Lowrie, 2011).

$$U_g = - \frac{GE}{a} \left[\begin{aligned} &1 + f + \frac{1}{2}m + \frac{1}{2}J_2 - \frac{3}{8}J_4 \\ &+ (f + \frac{3}{2}f^2 - \frac{1}{2}m - \frac{3}{2}fm - \frac{3}{2}(1-f)J_2 + \frac{15}{4}J_4)\cos^2\theta \\ &- (\frac{1}{2}f^2 - mf + \frac{9}{2}fJ_2 + \frac{35}{8}J_4)\cos^4\theta \end{aligned} \right] \quad \text{.....3.29}$$

Though by definition, the geopotential must be constant on the equipotential surface. However, the potential in equation 3.29 can vary with polar angle through the terms in $\cos^2\theta$ and $\cos^4\theta$. This apparent contradiction implies that the coefficients of these terms must be zero.

Gravity Field and Anomalies

The gravity field is the vector sum of gravitational attraction from all subsurface masses. It is a three-dimensional field that



varies in magnitude and direction with location. Gravity anomalies are variations that deviate from the expected value, caused by subsurface structures like faults, folds, density variations, underground cavities, and mineral deposit. There are several types of gravity anomalies and they include:

Regional anomalies which are large-scale variations in the gravity field, often related to crustal thickness or sedimentary basin structures. Local anomalies which are smaller-scale variations, typically associated with specific subsurface features like faults, folds, or mineral deposits. Residual anomalies which are anomalies remaining after removing regional trends, highlighting local subsurface features.

Bouguer anomalies are anomalies corrected for the gravitational effect of the Earth's surface topography.

Gravity anomalies can be caused by various subsurface features such as density variations (Differences in rock density, such as between sedimentary and basement rocks), Structural features such as faults, folds, and fractures that disrupt the subsurface density distribution. Mineral deposits and Underground cavities such as empty spaces like caves, tunnels, or voids can also cause gravity anomalies.

Regional and Residual Anomalies

The resultant effects of the inhomogeneous distribution of density in the Earth give rise to the development of a gravity anomaly (Lowrie, 1997). Over a high-density body, the measured gravity is augmented, after reduction to the

reference ellipsoid and subtraction of the normal gravity a positive gravity anomaly is obtained. Likewise, a negative anomaly results over a region of low density (Lowrie, 1997). The presence of a gravity anomaly indicates a body or structure with anomalous density; the sign of the anomaly is the same as that of the density contrast and shows whether the density of the body is higher or lower than normal. The appearance of a gravity anomaly is affected by the dimensions, density contrast and depth of the anomalous body. The horizontal extent of an anomaly is often called its apparent wavelength. The wavelength of an anomaly is a measure of the depth of the anomalous mass. Large, deep bodies give rise to broad (long-wavelength), low-amplitude anomalies while small, shallow bodies cause narrow(short-wavelength), sharp anomalies (Lowrie, 1997). Usually, a map of Bouguer gravity anomalies contains superposed anomalies from several sources. The long-wavelength anomalies due to very deep density contrasts are called regional anomalies. They are important for understanding the large-scale structure of the earth crusts under major geographic features such as mountain ranges, oceanic ridges and subduction zones. Short-wavelength residual anomalies are due to shallow anomalous masses that may be of interest for commercial exploitation. Geological knowledge is essential for interpreting residual anomalies. In eroded shield area like Canada or Scandinavia, anomalies with very short wavelength may be due to near-surface



mineralized bodies. In sedimentary basins, short or intermediate wavelength anomalies may arise from structures related to reservoirs or natural gas (Lowrie, 1997).

Separation of Regional and Residual Anomalies

The separation of anomalies of regional and local origin is an important step in the interpretation of a gravity map. The analysis may be used on selected profiles across some structure or it may involve two dimensional distributions of anomalies in a gravity map (Lowrie, 1997). Numerous techniques have been applied to the decomposition of a gravity anomaly into its constituent parts. They range in sophistication from simple visual inspection of the anomaly pattern to advanced mathematical analysis. A few examples are described below.

Visual Analysis

Visually fitting the large –scale trend with a smooth curve is the simplest way of representing the regional anomaly on a gravity profile (Lowrie, 1997). The value of the regional gravity given by this trend is subtracted point by point from the Bouguer gravity anomaly. This method allows the interpreter to fit curves that leave residual anomalies with a sign appropriate to his interpretation of the density distribution. This approach may be adapted to the analysis of a gravity map by visually smoothing the contour lines (Lowrie, 1997). The values of the regional and original Bouguer gravity anomaly are interpolated from the corresponding maps at

points spaced on a regular grid. The regional value is subtracted from the Bouguer anomaly at each point and the computed residuals are contoured to give a map of the local gravity anomaly.

Polynomial Representation

In an alternative method, the regional trend is represented by a straight line on more generally by smooth polynomial curve (Lowrie, 1997). If x denotes the horizontal position on a gravity profile, the regional gravity Δg_R may be written as

$$\Delta g_R = \Delta g_0 + \Delta g_1 x + \Delta g_2 x^2 + \Delta g_3 x^3 + \Delta g_4 x^4 + \Delta g_5 x^5 + \dots + \Delta g_n x^n \dots \dots 3.30$$

The polynomial is fitted by the method of least squares to the observed gravity profile. This gives optimum values for the coefficients Δg_n . The method also has drawbacks. The higher the order of the polynomial, the better it fits the observations. The ludicrous extreme is when the order of the polynomial is one less than the number of observations, the curve then passes perfectly through all the data points but the regional gravity anomaly has no meaning geologically. The interpreter's judgment is important in selecting the order of the polynomial which is usually chosen to be the lowest possible order that represent most of the regional trend. Moreover, a curve fitted by least squares must pass through the mean of the gravity values so that the residual anomalies are divided equally between positive and negative values. Each residual anomaly is flanked by anomalies of opposite sign which are due to the



same anomalous mass that caused the central anomaly and so have no significance of their own. Polynomial fitting can also be applied to gravity maps. It is assumed that the regional anomaly can be represented by a smooth surface, $\Delta_g(x, y)$, which is a low-order polynomial of the horizontal position coordinates x , and y . In the simplest case, the regional anomaly is expressed as a first order polynomial or plane, to express changes in the gradient of gravity; a higher-order polynomial is needed. For example, the regional gravity given by a second-order polynomial is

$$\Delta_g(x, y) = \Delta g_0 + \Delta g_{x1}x + \Delta g_{y1}y + \Delta g_{x2}x^2 + \Delta g_{y2}y^2 + \Delta g_{5xy}xy \dots \dots \dots 3.31$$

As in the analysis of a profile, the optimum values of the coefficients Δg_{x1} , Δg_{y1} and others are determined by least squares fitting. The residual anomaly is again computed point by point by subtracting the regional from the original data.

Fourier Analysis

The gravity anomaly along a profile can be analyzed with techniques developed for investigating time series (Lowrie, 1997). Instead of varying with time as the seismic signal does in a seismometer, the gravity anomaly $\Delta g(x)$ varies with position x along the profile. For a spatial distribution, the wave number $k = 2\pi/\lambda$ is the counterpart of the frequency of a time series. If it can be assumed that its variation is periodic, the function $\Delta g(x)$ can be expressed as the superposition of

discrete harmonics. Each harmonic is a sine or cosine function whose argument is a multiple of the fundamental wave number which is defined by a wavelength λ that is twice the signal strength of the anomaly

$$\Delta g(x) = \sum_{n=1}^N (a_n \cos \frac{2n\pi x}{\lambda} + b_n \sin \frac{2n\pi x}{\lambda}) \dots \dots \dots 3.32$$

The expression for $\Delta g(x)$ is called Fourier series. In this example, it is truncated after N sine and N cosine terms. In principle, the value of N can be as large as necessary to describe the regional anomaly adequately; a decision is that must be made on practical grounds by the interpreter. The importance of any individual term of order n is described by the relative value of the coefficients a_n and b_n to be calculated. If integrated over a full cycle, the resulting value of a sine or cosine function is zero; only the squared values of sine or cosines do not integrate to zero. If equation 3.32 is multiplied by $\cos \frac{2m\pi x}{\lambda}$, we get $\Delta g(x) \cos \frac{2m\pi x}{\lambda}$ on the left side and product terms $\cos \frac{2n\pi x}{\lambda} \cos \frac{2m\pi x}{\lambda}$ and $\sin \frac{2n\pi x}{\lambda} \cos \frac{2m\pi x}{\lambda}$ on the right side. Each product can be written as the sum or difference of the two sines or cosines. Thus, if the $\Delta g(x) \cos \frac{2m\pi x}{\lambda}$ is integrated over a full cycle, all terms on the right side vanish except for the case where n equals m ; this yields the values of the coefficients a_n and b_n , namely

$$a_n = \frac{2}{\lambda} \int_0^\lambda \Delta g(x) \cos \frac{2n\pi x}{\lambda} dx$$



$$b_n = \frac{2}{\lambda} \int_0^\lambda \Delta g(x) \sin \frac{2n\pi x}{\lambda} dx \dots\dots\dots 3.33$$

The two-dimensional variation of a mapped gravity anomaly can be expressed in a similar way with the aid of *double fourier series*. In this case, the gravity anomaly is a function of both the x – and y –coordinates and can be written as

$$\Delta g(x, y) = \sum_{n=1}^N \sum_{m=1}^M a_{nm} C_n C_m + b_{nm} C_n S_m + c_{nm} S_n C_m + d_{nm} S_n S_m \dots\dots\dots 3.34$$

Where;

$$C_n = \cos \frac{2n\pi x}{\lambda}; S_n = \sin \frac{2n\pi x}{\lambda}$$

$$C_m = \cos \frac{2m\pi x}{\lambda}; S_n = \sin \frac{2m\pi y}{\lambda} \dots\dots\dots 3.35$$

The derivation of the coefficients a_{nm} , b_{nm} , c_{nm} , and d_{nm} is similar to the one-dimensional case, but is somewhat more complicated. As in the simpler one-dimensional case of gravity anomaly on a profile the expression of two-dimensional gravity anomalies by double fourier series is analogous to summing weighted sinusoidal functions. These can be visualized as corrugations of the $x - y$ plane with each corrugation weighted according to its importance to $\Delta g(x, y)$.

Gravity Anomaly Enhancement and Filtering

Since a function that is periodic can be expressed as a Fourier sum of harmonics of a fundamental wavelength. The requirement of periodic behavior and discreteness of harmonic content are often not met. For example, the variation of gravity from one point to another is

usually not periodic (Lowrie, 1997). Moreover, if the harmonic content of a function is made up of distinct multiples of a fundamental frequency or wave number, the wavelength spectrum consists of a number of distinct values. Yet many functions of geophysical interest are best represented by a continuous spectrum of wavelengths. This kind of problem, fourier sum of individual terms is replaced by *fourier integral* which consists of a continuous set of frequencies and wave numbers instead of a discrete set. The fourier integral can be used to represent non-periodic functions. It is uses complex numbers (numbers that involve the square root of -1). Instead of equation 3.32, we have

$$g(x) = \int_{-\infty}^{\infty} G(u) e^{iux} du$$

Where;

$$G(u) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \Delta g(x) e^{-iux} dx \dots\dots\dots 3.36$$

The complex function $G(u)$ defined by equation 3.36 is called the fourier transform of the real – valued function $\Delta g(x, y)$. A map of gravity anomalies can be represented by a function $\Delta g(x, y)$ of the Cartesian map coordinates. The fourier transform of $\Delta g(x, y)$ is a two-dimensional complex function that involves wave number k_x band k_y defined by wavelength of the gravity field with respect to the x and y axes ($k_x = 2\pi/\lambda_x$; $k_y = 2\pi/\lambda_y$). It is

$$G(x, y) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \Delta g(x, y) \{ \cos(k_x x + k_y y) - \sin(k_x x + k_y y) \} \dots\dots\dots 3.36$$



This equation assumes that the observation $\Delta g(x,y)$ can be represented by a continuous function defined over an infinite $x-y$ plane whereas the data are of time extent and are known at discrete points of a measurement grid. In practice, these inconsistencies are usually not important. Efficient computer algorithms permit the rapid computation of the fourier transform $G(x,y)$ of the gravity anomaly $\Delta g(x,y)$. The two-dimensional Fourier transform simplifies the operation of digital filtering the gravity anomalies. A filter is a spatial function of the coordinates x and y . When the function $\Delta g(x,y)$ representing the gravity data is multiplied by the filter function, a new function is produced. The process is called convolution and the output is a map of the filtered gravity data. The computation in the spatial domain defined by the x and y coordinates can be time consuming. It is often faster to compute the fourier transforms of the gravity and filter functions multiply these together in the fourier domain and inverse fourier transform the product back to the spatial domain. The nature of the filter applied in the fourier domain can be chosen to eliminate certain wavelengths. For example, it can be designed to cut out all wavelengths. For example, it can be designed to cut out all wavelengths shorter than a selected wavelength and to pass longer wavelengths; this is called a low pass filter because it passes long wavelengths that have low wave numbers. The irregularities in bouguer gravity anomaly map are removed by low pass filtering leaving a filtered map that is much smoother than the original. Alternatively, the filter in the fourier domain can be designed to eliminate wavelength longer than a selected wavelength

and to pass shorter wavelengths. The application of such high-pass filter enhances the short-wavelengths. The application of such a high-pass filter enhances the short-wavelength (high wave number) components of the gravity map. Wavelength filtering can be used to emphasize selected anomalies. For example, in studying large-scale crustal structure the gravity anomalies due to local small bodies are of less interest than the regional anomalies which can be enhanced by applying a low pass filter. Conversely, in the investigation of anomalies due to shallow crustal sources the regional effect can be suppressed by high-pass filtering (Lowrie, 1997).

3.2 Field Operations for Data Acquisition in the Study Area

Gravity method of geophysical Investigation was utilized in Ibeyin-Adun 1 to determine subsurface anomalous variation using Scintrex (CG-5 Autograv meter). The equipment was calibrated before working hours so that the restoring force can be translated into precise measuring of gravity, typically in units of milliGals (mGal). The equipment was placed on the tripod and leveled using the tripod screws. (Figure 3.3). A 100m long profile with a space of 5m and interpolate cycle (N) of N1, N2, N3 and N4 was adopted for relatively deeper penetration. A base station was picked then different points were taken on a traverse line 5m apart and two traverse was used with 5meters spacings. Each readings takes 4 minutes and at 1 hours interval, a reading is being taken at the base station while GPS was used to collate the coordinate and altitude in each station. The first reading was taken at the base station and every hour, readings were taken at the base station to serve as references and to ensure

standardization of gravity measurements. Consecutive readings were taken from different points at 5m distance from each other in a traverse line. Each traverse line had a 2m distance from each other. The instrument was powered on and was leveled by rotating the foot screws in the direction indicated by the icons on the top corners of the screen. The orientation is shown in arc seconds and the definition of the axes of rotation and the sign convection is shown. Rotation was continued until the intersection of the cross-hairs was within the small circle (± 10 arcsec). After the arc of the circle was achieved, the measure button was used to process the data acquisition. The current column on the gravimeter screen contains the current gravity value after filtering and with all corrections applied together with the other measured variables, time and station information. Initially, the last recorded reading was displayed in the preceding column. In the course of this study, four cycles for four minutes were used to achieve four different readings which were indicated as N1, N2, N3, and N4

which represent gravity data or measurements at a specific location or station. N1 represents (the initial gravity measurement at a station), N2 represents (the second measurement at the same location usually taken every minute, N3 represents the third measurement and N4 represents the fourth reading. For a daily survey, the assumption of a linear drift is typically sufficient; however, as demonstrated by Bonval *et al.*, 1998, there are noticeable changes in linearity in the recordings made over several days of continuous gravity field measurement. As a result, the user must return to the base more often than every 0.5 hr, for continuous surveys. In detail surveys one of the key parts is to remove the earth tide effect because their body gravity effects could be larger than variations in margins on a site due to changes beneath the land surface which are intended for environmental and engineering investigations. The raw data were imputed into the system in Excel format consequently processed, plotted and interpreted.



Figure 3.2: CG-5 Autograv meter and other field accessories

Ishola S. A

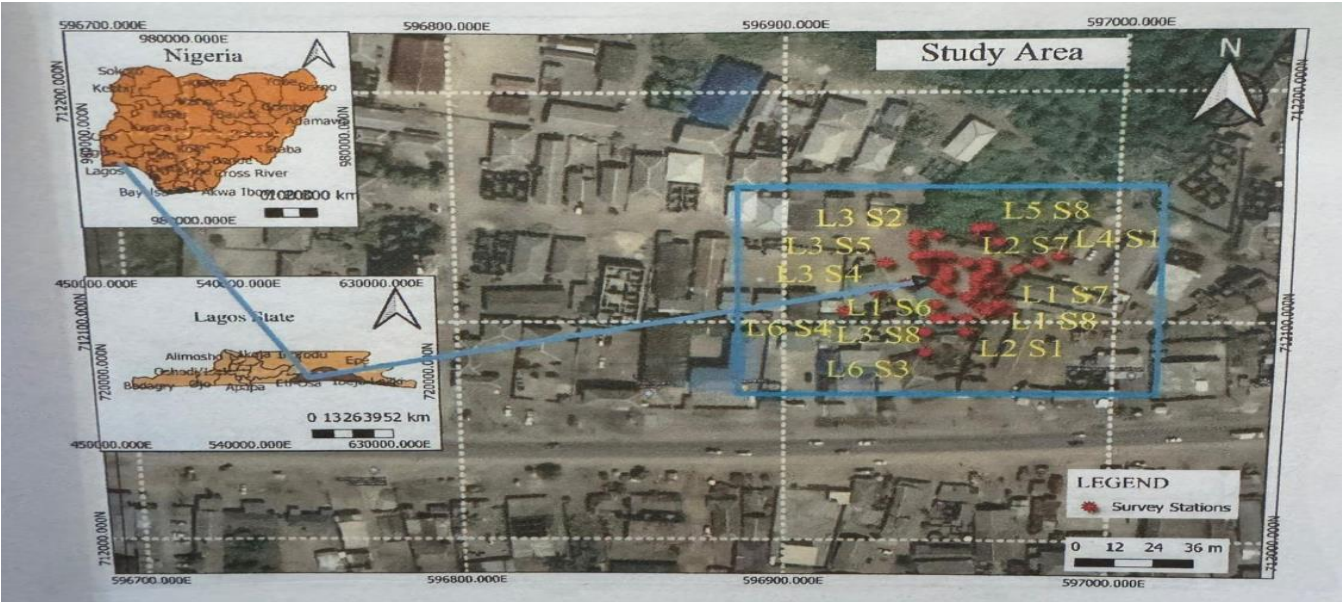


Figure 3.3: Satellite Map of the Study Area in Google Earth Imagery

4.0 Results and Discussion

4.1 Gravity Variations of the study Area

4.1.1 Description of Gravity Variation in Traverse 1

The variation in gravity values were observed and interpreted using 3D Stacked Column, using 3D lines, High –Low close Description as respectively displayed in figure 4.1a, 4.1b and 4.1c for traverse line 1.

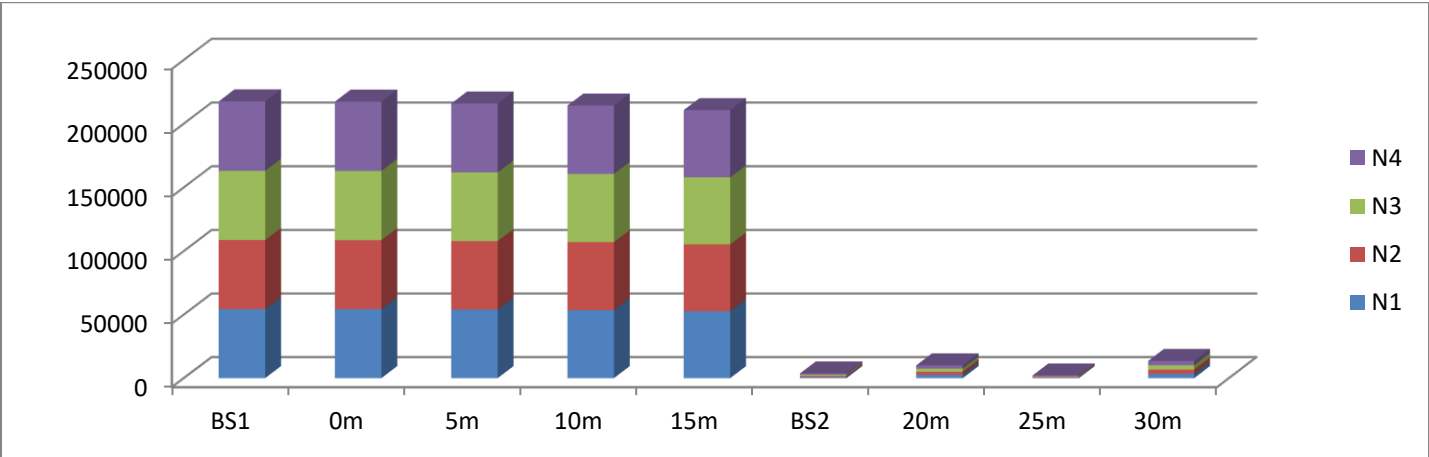


Figure 4.1a: Distribution of gravity changes in Igbeyin-Adun Area 1 line 1 using 3D Stacked Column

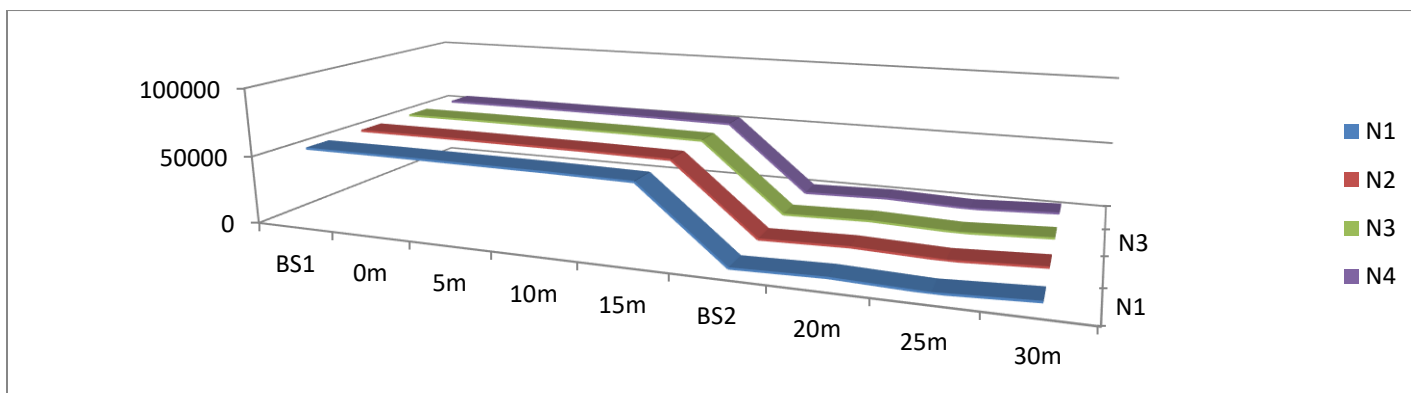


Figure 4.1b: Level of gravity changes in Igbeyin-Adun Area 1 using 3D lines

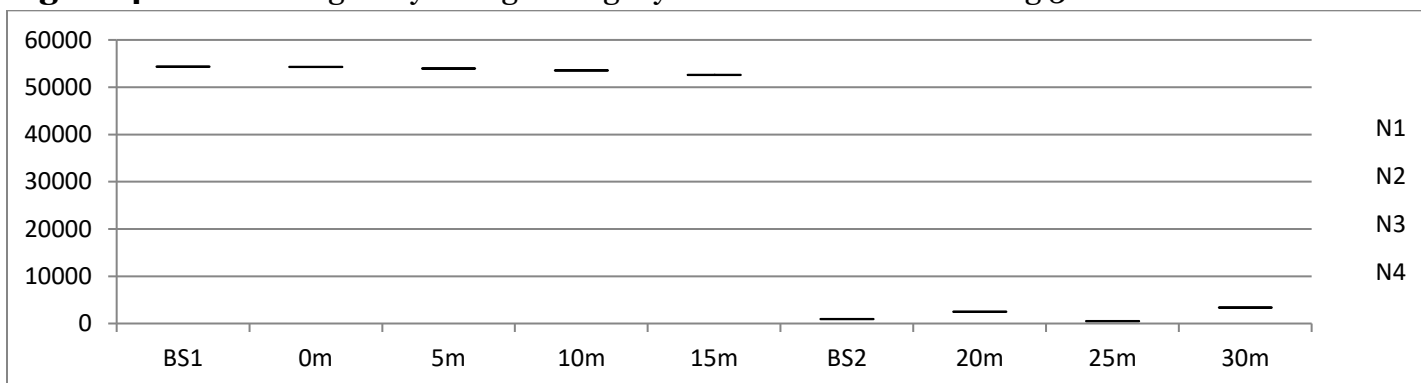


Figure 4.1c: High –Low close Description of gravity changes in Igbeyin-Adun Area 1 in line1

4.1.2 Bouguer, Regional and Residual Anomaly in Traverse 1

The gravity profile along the traverse is shown in Figure 4.1d to 4.1f below. A total length of 30 m with station spacing of 5 m was investigated. The bouguer anomaly data is plotted as profile and displayed in figure 4.1d. Figure 4.1e is the regional residual separation profile with a trend line representing the regional gravity field, and Figure 4.1f is the graph of the residual gravity profile showing the effect of the near-surface geology. The residual profile is interpreted for any gravity anomaly. From the residual anomaly plot, the profile shows major anomalous regions which occur at lateral distance between 5 to 17 m and 17 to 25 m having gravity value of 42000 and -30000 mGal respectively. These anomalous zones are indicative of low-density and high-density body that could represent possible buried utilities (like buried pipe or buried iron) within the area.

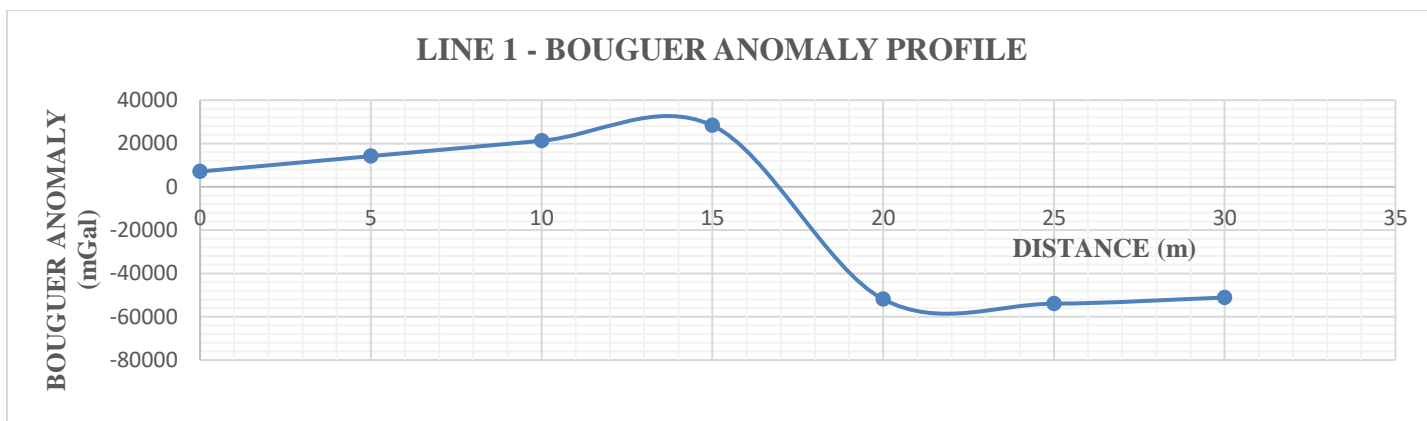


Figure 4.1d: Bouguer Anomaly Profile along Traverse 1

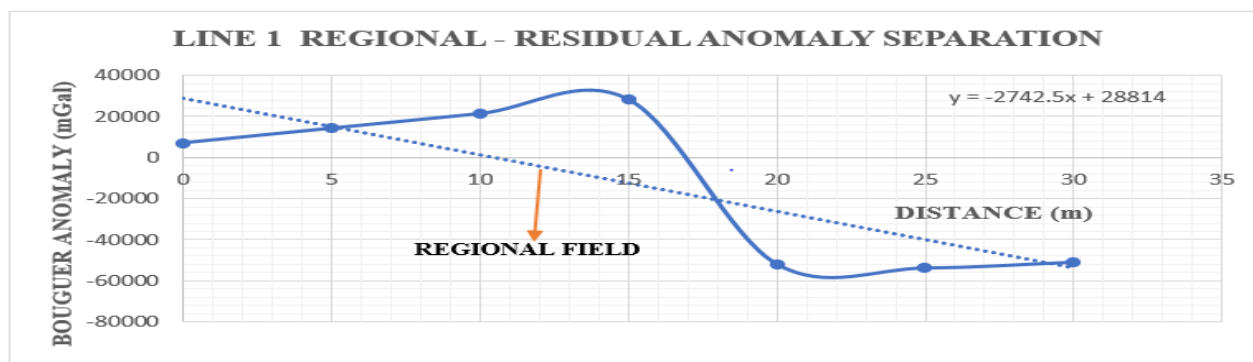


Figure 4.1e: Regional - Residual Anomaly Profile along Traverse 1

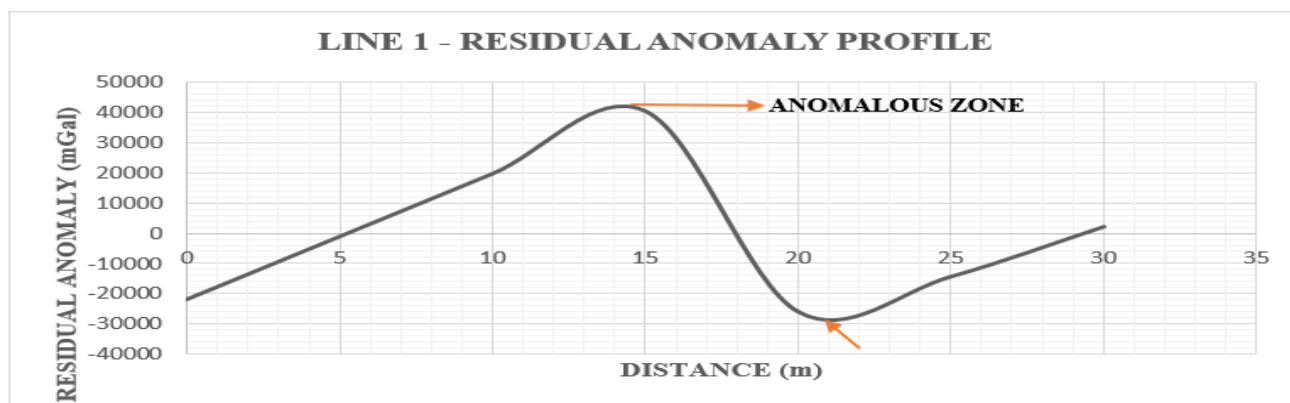


Figure 4.1f: Residual Anomaly Profile along Traverse 1

4.2.1 Description of Gravity Variation in Traverse 2

The variation in gravity values were observed and interpreted using 3D Stacked Column, using 3D lines, High –Low close Description as respectively displayed in figure 4.2a, 4.2b and 4.2c for traverse line 2.

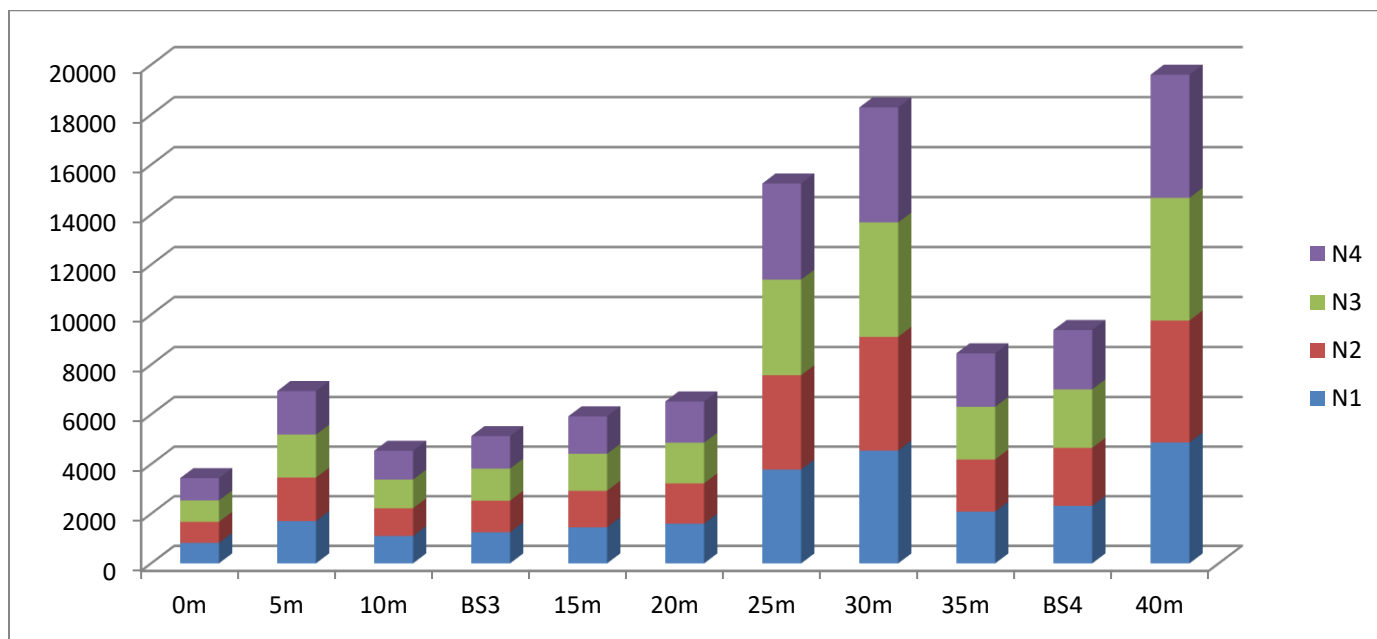


Figure 4.2a: Distribution of gravity changes using 3D Stacked Column in Igbeyin-Adun Area 1 line 2

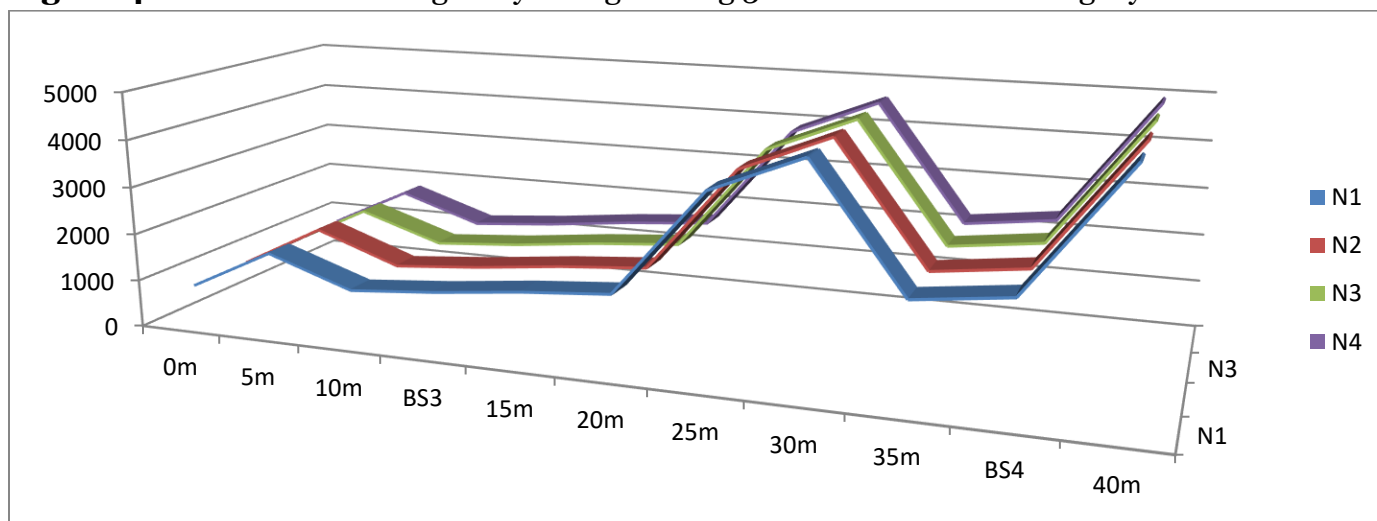


Figure 4.2b: Level of gravity changes in Igbeyin-Adun Area 1 line 2 using 3D lines.

Ishola S. A

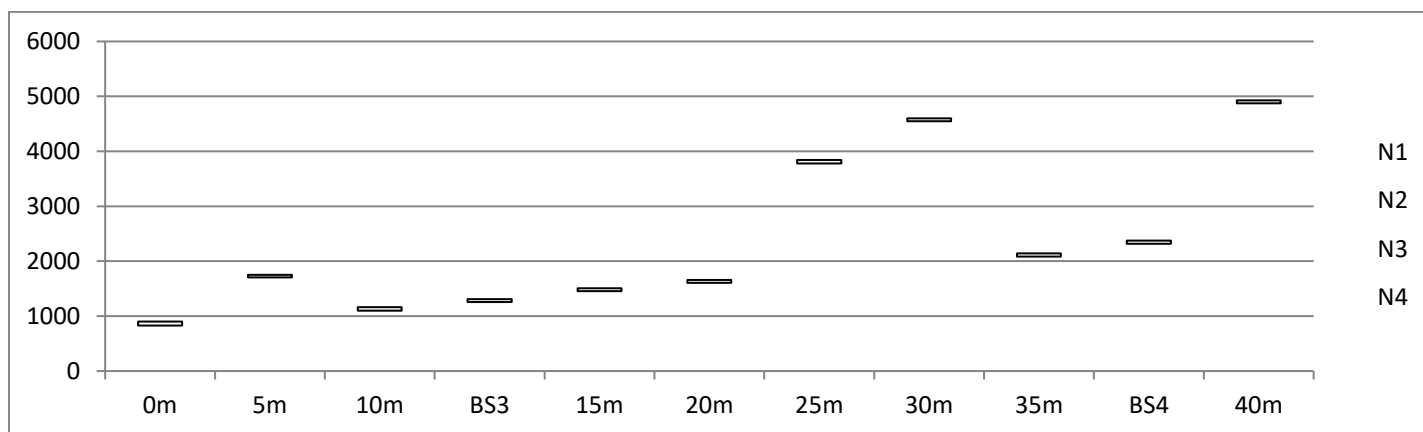


Figure 4.2c: High –Low close Description of gravity changes in Igbeyin-Adun Area 1 line 2

4.2.2 Bouguer, Regional and Residual Anomaly Profile in Traverse 2

The gravity profile along the traverse is shown in Figure 4.2d to 4.2f below. A total length of 40 m with station spacing of 5 m was investigated. The bouguer anomaly data is plotted as profile and displayed in Figure 4.2d. Figure 4.2e is the regional residual separation profile with a trend line representing the regional gravity field, and Figure 4.2f is the graph of the residual gravity profile showing the effect of the near-surface geology. The residual profile is interpreted for any gravity anomaly. From the residual anomaly plot, the profile shows major anomalous regions which occurred at lateral distance between 22 to 32 m and 32 to 40m having gravity value of 1400 and -1800 mGal respectively. These anomalous zones are indicative of low-density and high-density body that could represent possible buried utilities (like buried pipe or buried iron) within the study area.

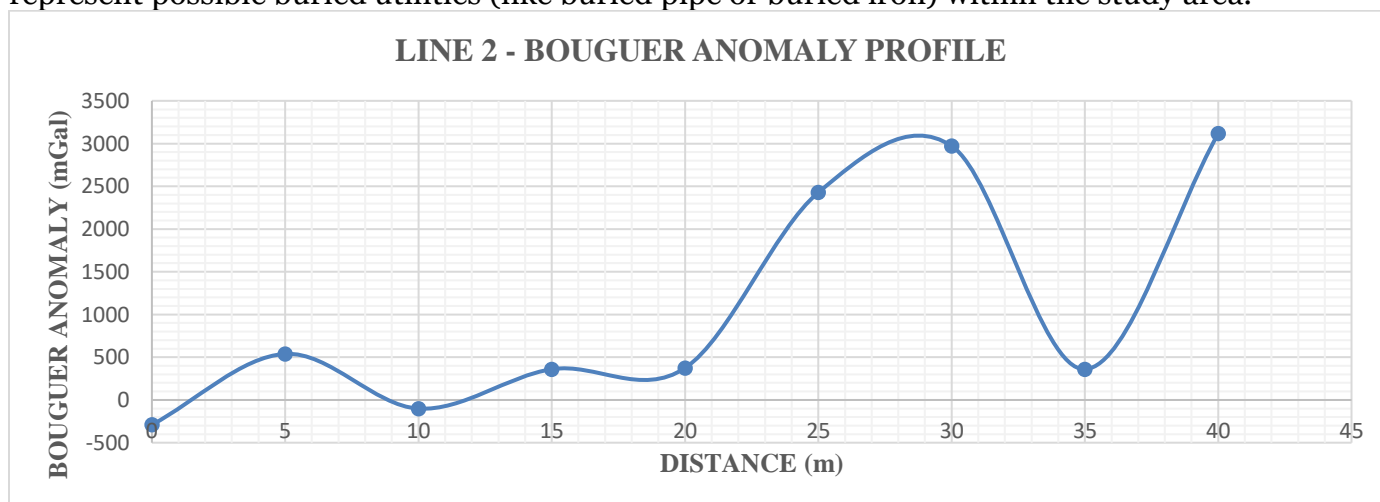


Figure 4.2d: Bouguer Anomaly Profile along Traverse 2

Ishola S. A

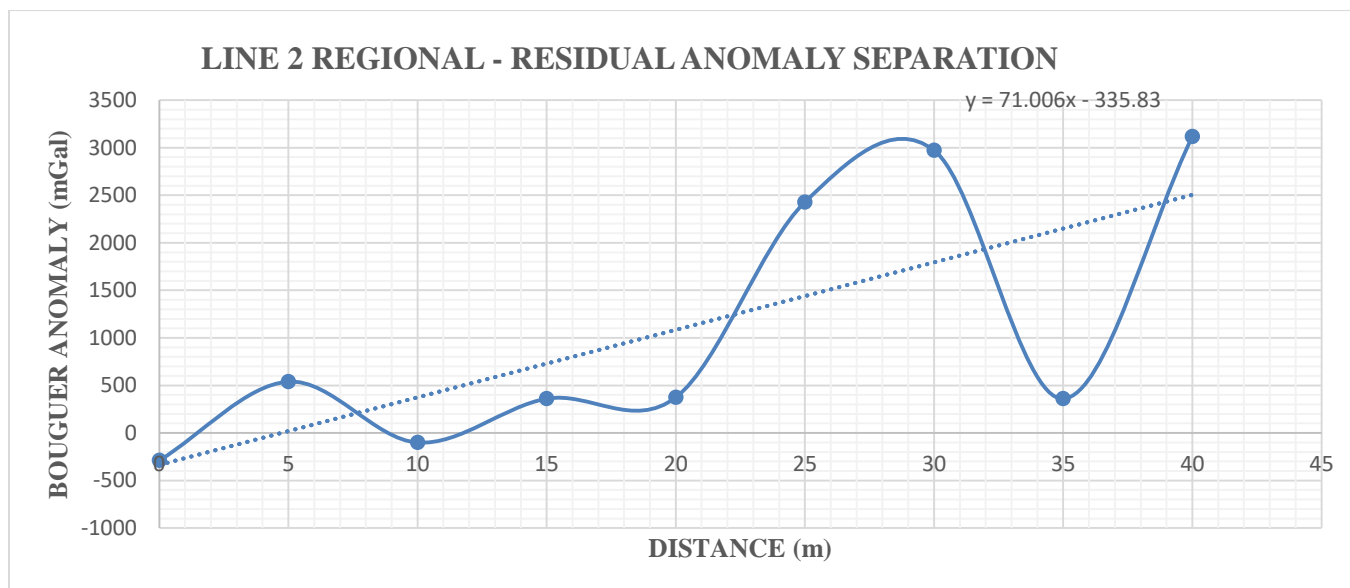


Figure 4.2e: Regional - Residual Anomaly Profile along Traverse 2

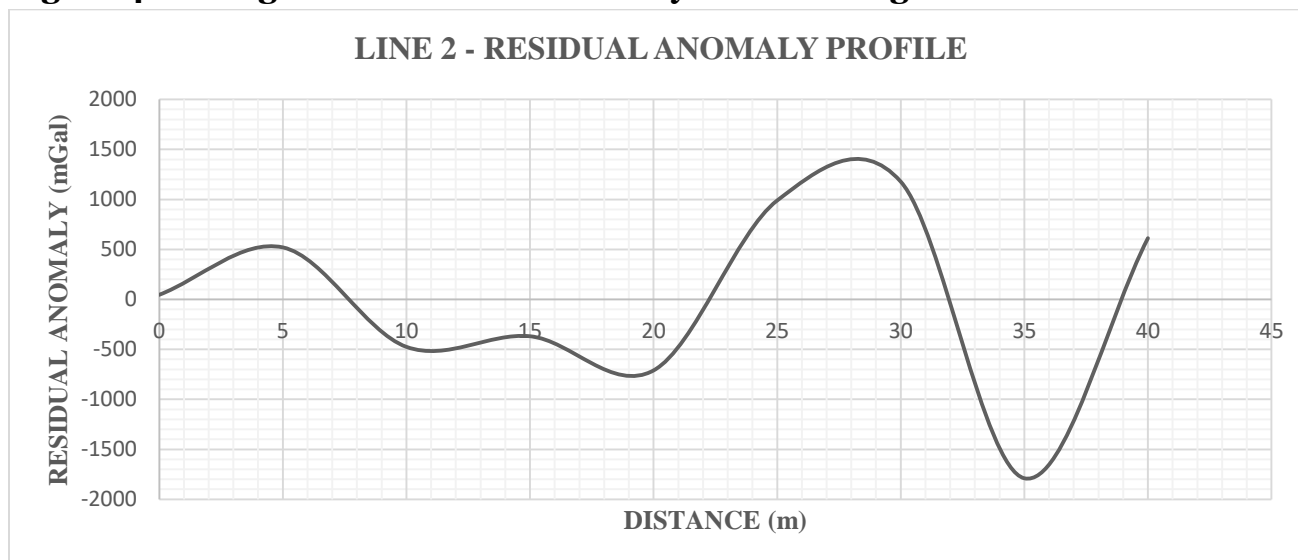


Figure 4.2f: Residual Anomaly Profile along Traverse 2

4.3.1 Description of Gravity Variation in Traverse 3

The variation in gravity values were observed and interpreted using 3D Stacked Column, using 3D lines, High –Low close Description as respectively displayed in figure 4.3a, 4.3b and 4.3c for traverse line 1.

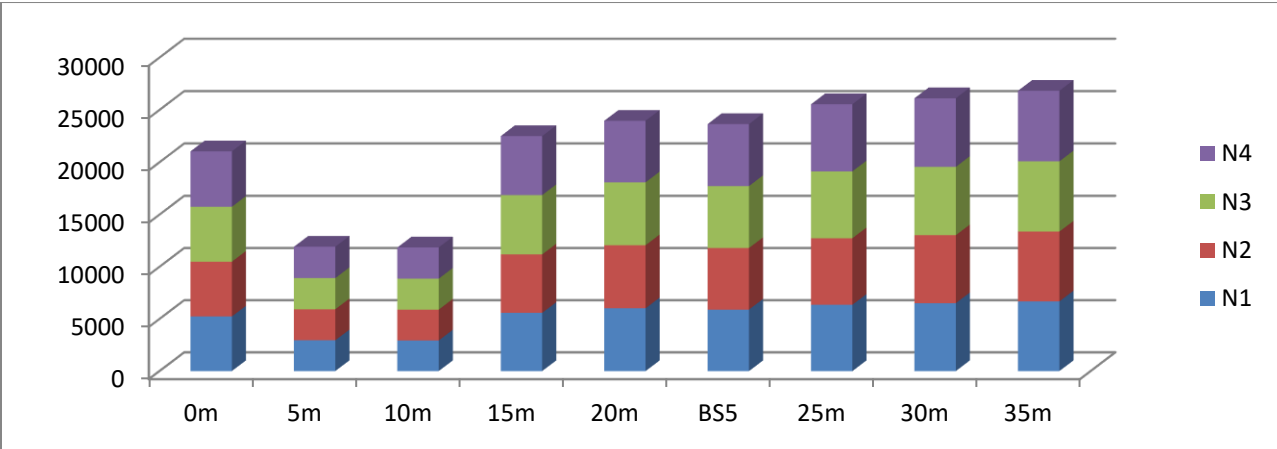


Figure 4.3a: Distribution of gravity changes in Igbeyin-Adun Area 1 line 3 using 3D Stacked Column

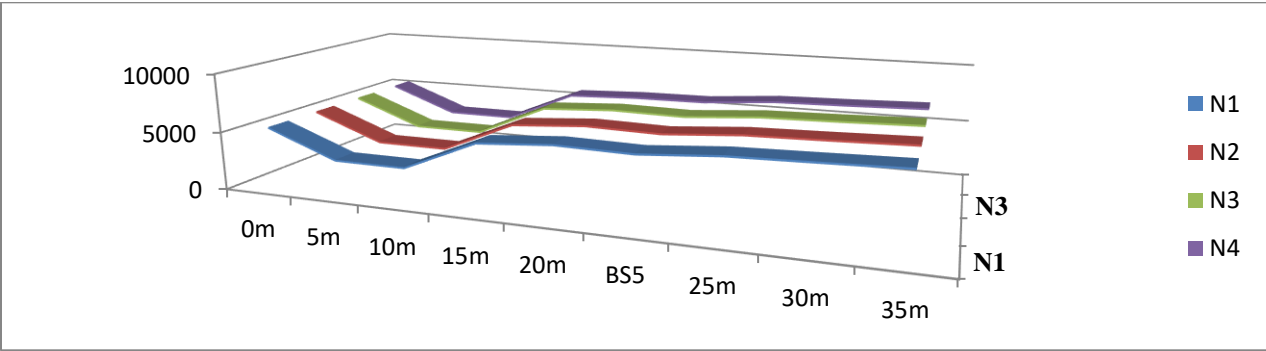


Figure 4.3b: Level of gravity changes Igbeyin-Adun Area 1 line 3 using 3D lines

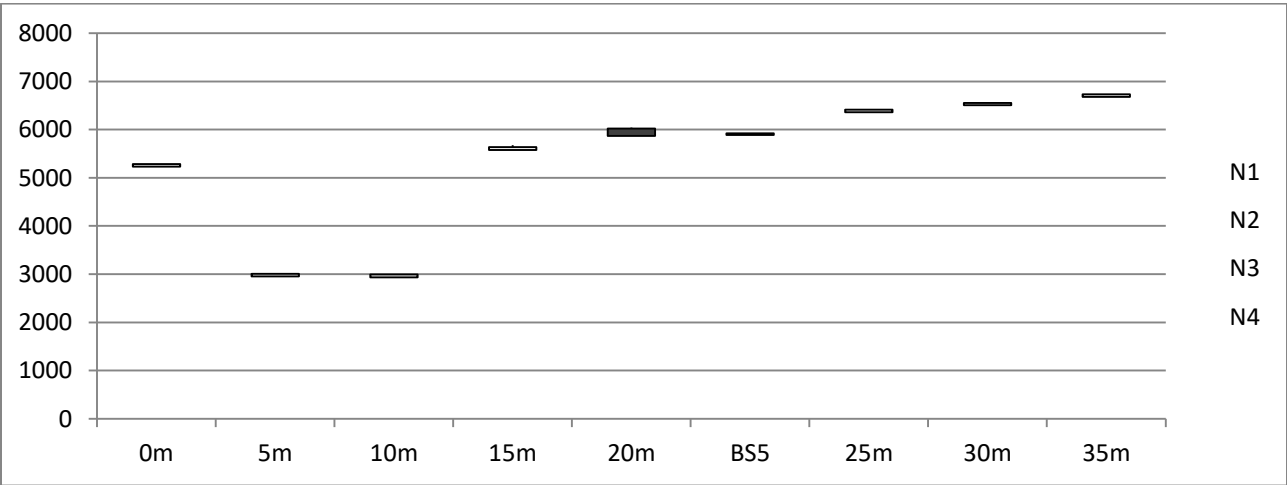


Figure 4.3c: High –Low close Description of gravity changes in Igbeyin-Adun Area 1 line3

4.3.2 Bouguer, Regional and Residual Anomaly Profile in Traverse 3

The gravity profile along the traverse is shown in Figure 4.3d to 4.3f below. A total length of 35m with station spacing of 5 m was investigated. The bouguer anomaly data is plotted as profile and displayed in figure 4.3d. Figure 4.3e is the regional residual separation profile with a trend line representing the regional gravity field, and Figure 4.3f is the graph of the residual gravity profile showing the effect of the near-surface geology. The residual profile is interpreted for any gravity anomaly. From the residual anomaly plot, the profile shows major anomalous regions which occurred at lateral distance between 3.5 to 15 m, 13 to 19m and 22.5 to 35 m having gravity value of -2100, -600 and 1400mGal respectively. These anomalous zones are indicative of low-density and high-density body that could represent possible buried utilities (like buried pipe or buried iron) within the study area.

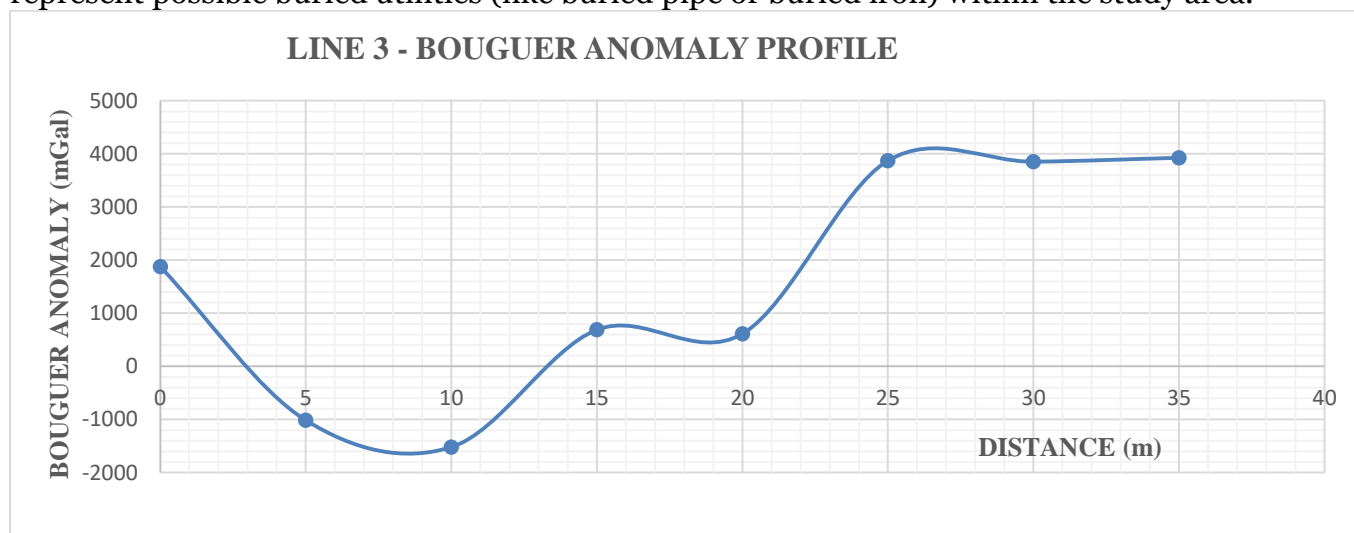


Figure 4.3d: Bouguer Anomaly Profile along Traverse 3

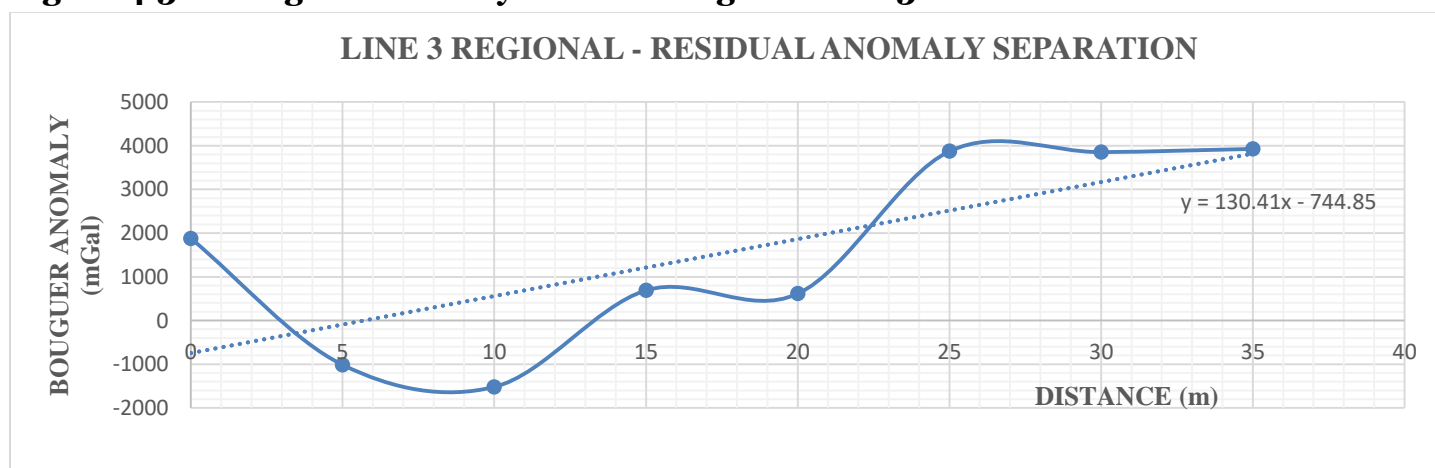


Figure 4.3e: Regional - Residual Anomaly Profile along Traverse 3

Ishola S. A

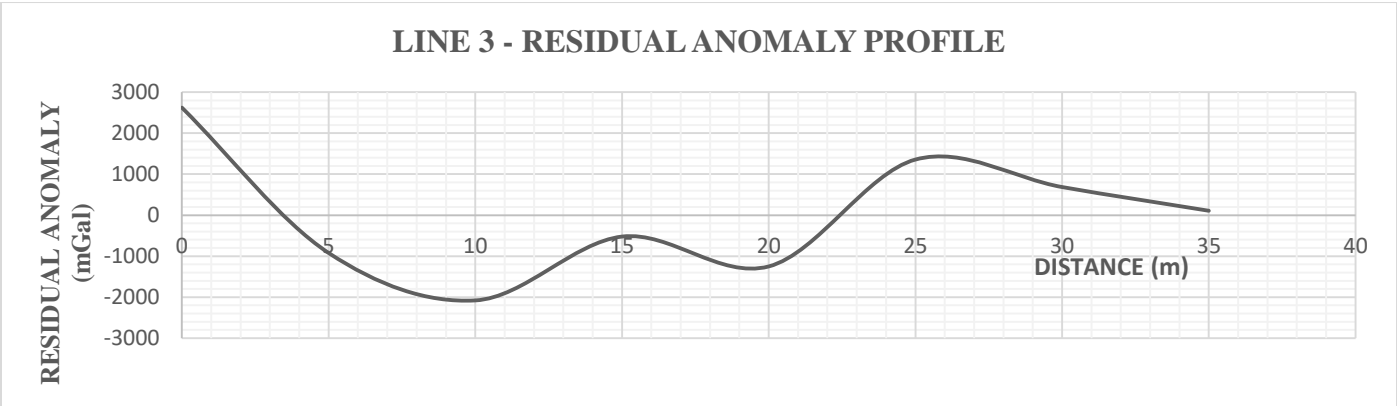


Figure 4.3f: Residual Anomaly Profile along Traverse3

4.4.1 Description of Gravity Variation in Traverse 4

The variation in gravity values were observed and interpreted using 3D Stacked Column, using 3D lines, High –Low close Description as respectively displayed in figure 4.4a, 4.4b and 4.4c for traverse line 4.

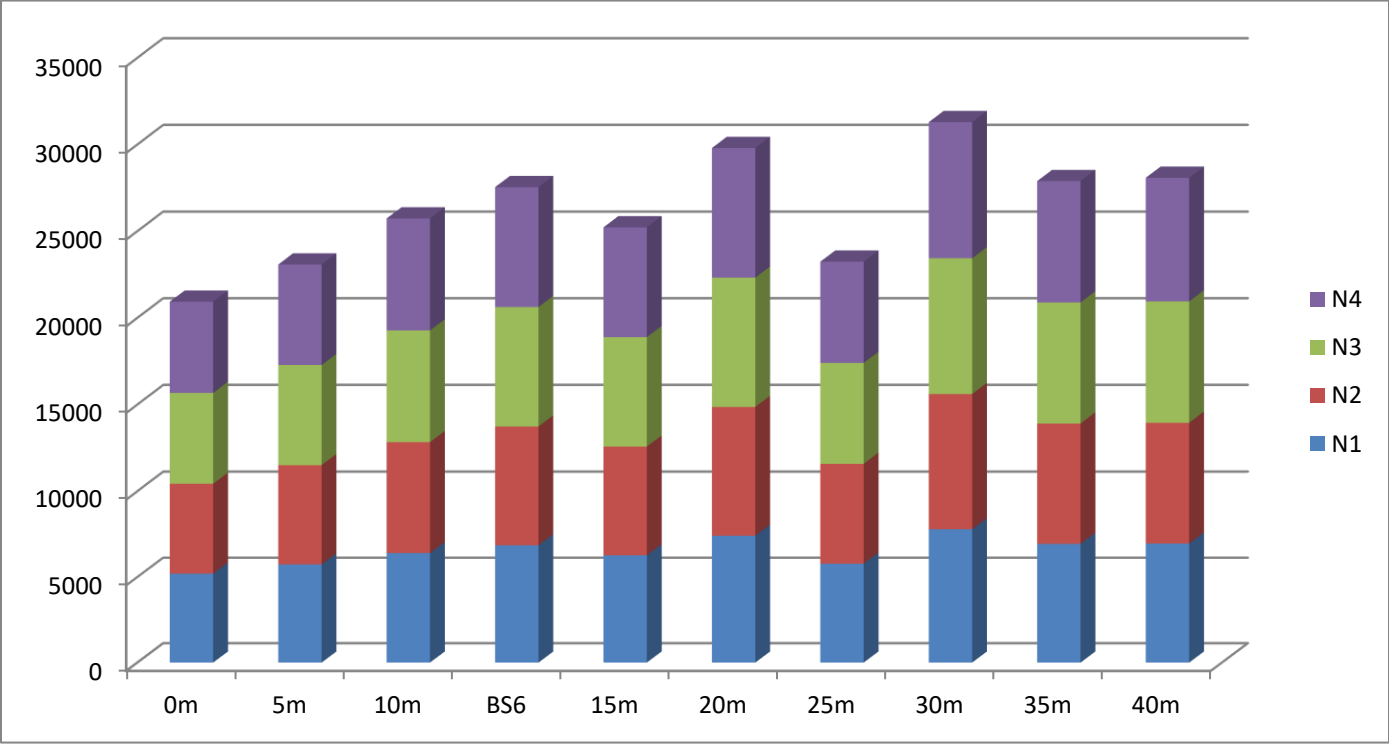


Figure 4.4a: Distribution of gravity changes in Igbeyin-Adun Area 1 line 4 using 3D Stacked Column

Ishola S. A

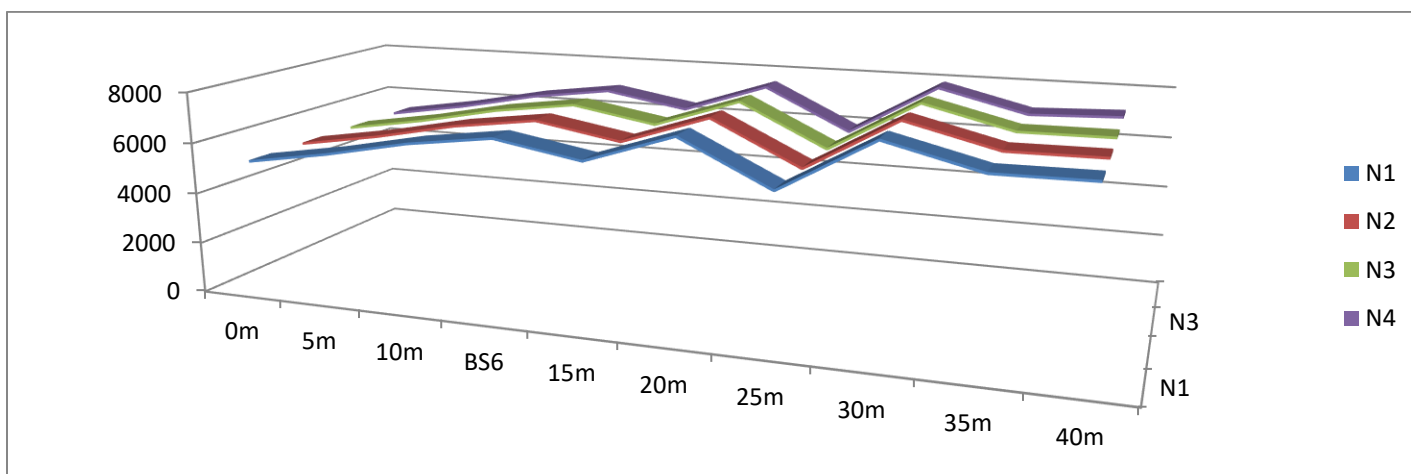


Figure 4.4b: Level of gravity changes in Igbeyin-Adun Area 1 line 4 using 3D lines

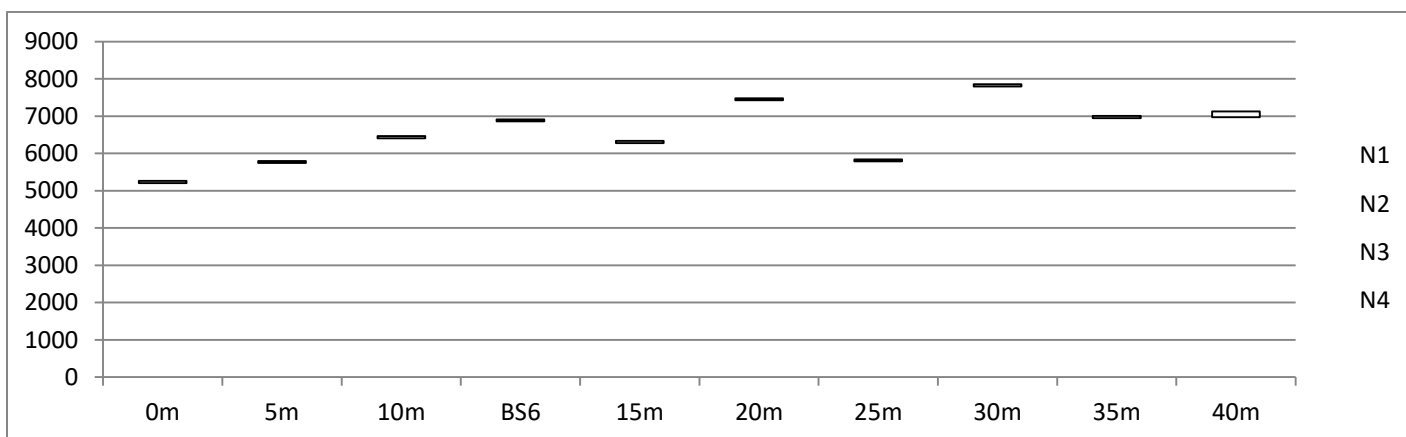


Figure 4.4c: High–Low close Description of gravity changes in Igbeyin-Adun Area 1 line 4

4.4.2 Bouguer, Regional and Residual Anomaly Profile in Traverse 4

The gravity profile along the traverse is shown in Figure 4.4d to 4.4f below. A total length of 40m with station spacing of 5 m was investigated. The bouguer anomaly data is plotted as profile and displayed in Figure 4.4d. Figure 4.4e is the regional residual separation profile with a trend line representing the regional gravity field, and Figure 4.4f is the graph of the residual gravity profile showing the effect of the near-surface geology. The residual profile is interpreted for any gravity anomaly. From the residual anomaly plot, the profile shows several anomalous regions which occurred along the profile whose gravity values of varies from 700 to 1500mGal. These anomalous zones are indicative of high-density body that could represent possible buried utilities (like buried pipe or buried iron) within the study area.

Ishola S. A

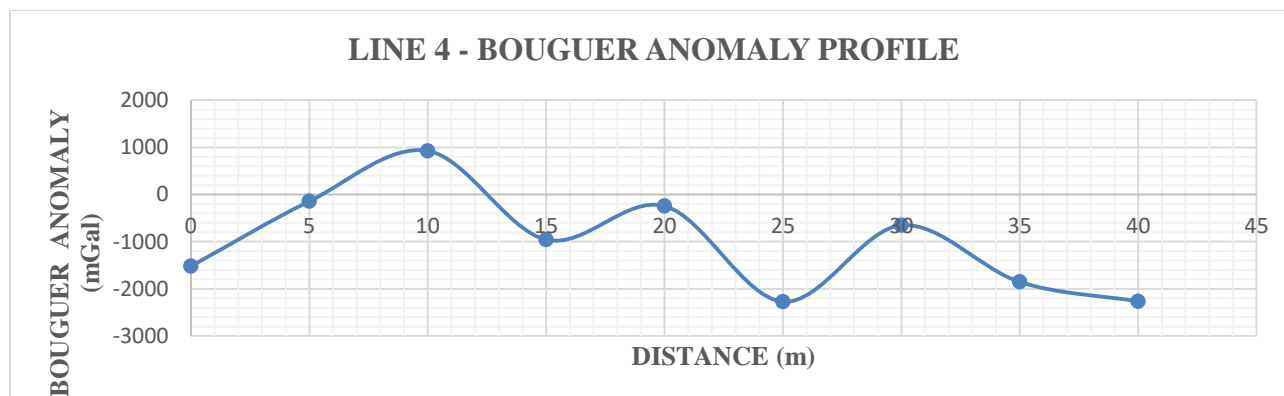


Figure 4.4d: Bouguer Anomaly Profile along Traverse 4

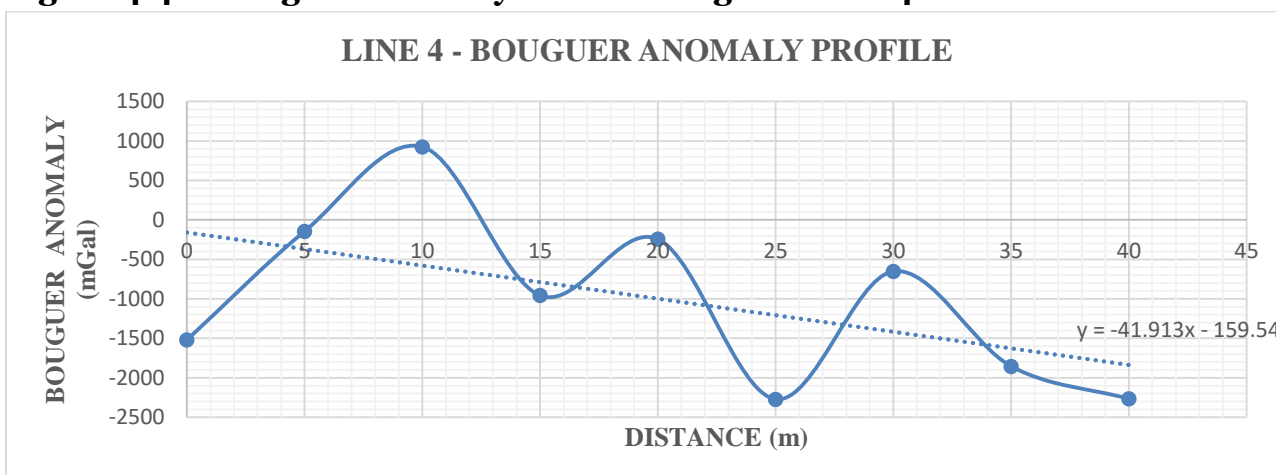


Figure 4.4e: Regional - Residual Anomaly Profile along Traverse 4

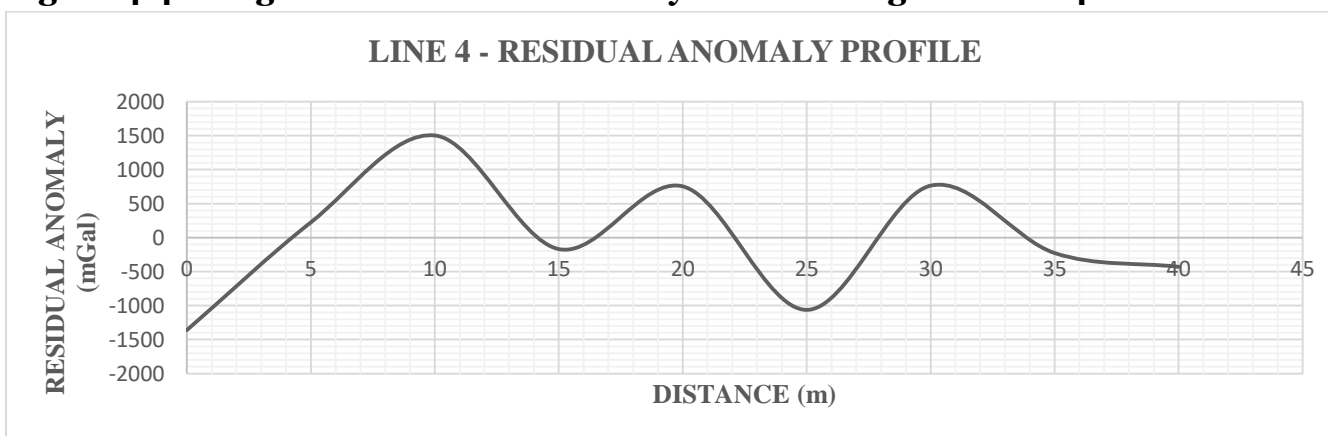


Figure 4.4f: Residual Anomaly Profile along Traverse 4

Ishola S. A

4.5.1 Description of Gravity Variation in Traverse 5

The variation in gravity values were observed and interpreted using 3D Stacked Column, using 3D lines, High –Low close Description as respectively displayed in figure 4.5a, 4.5b and 4.5c for traverse line 5.

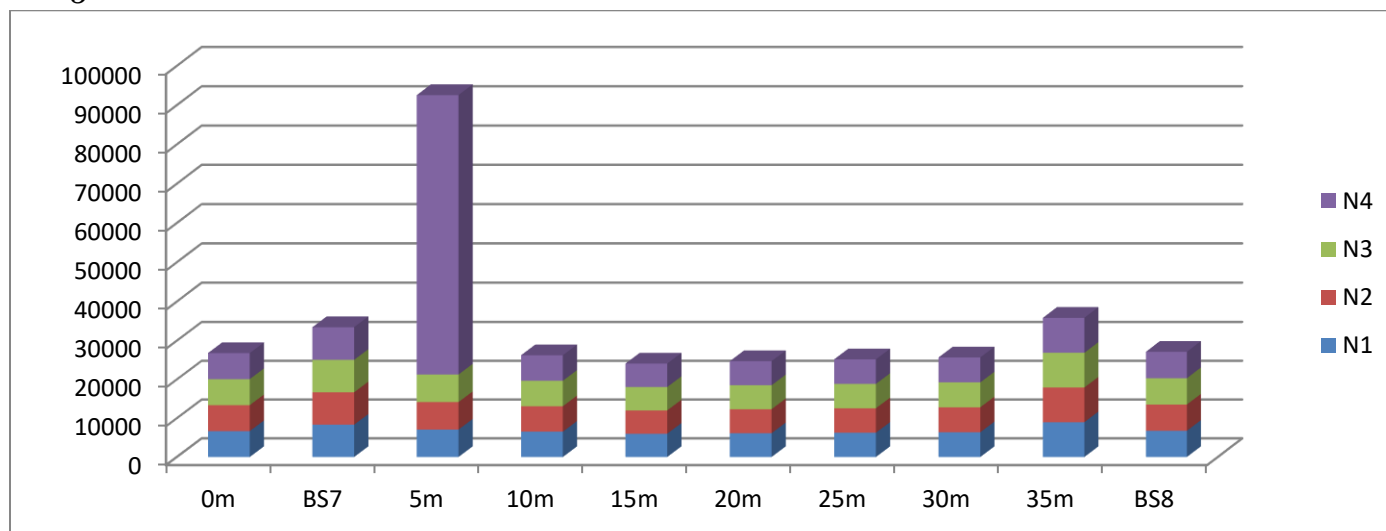


Figure 4.5a: Distribution of gravity changes in Igbeyin-Adun Area 1 line 5 using 3D Stacked Column

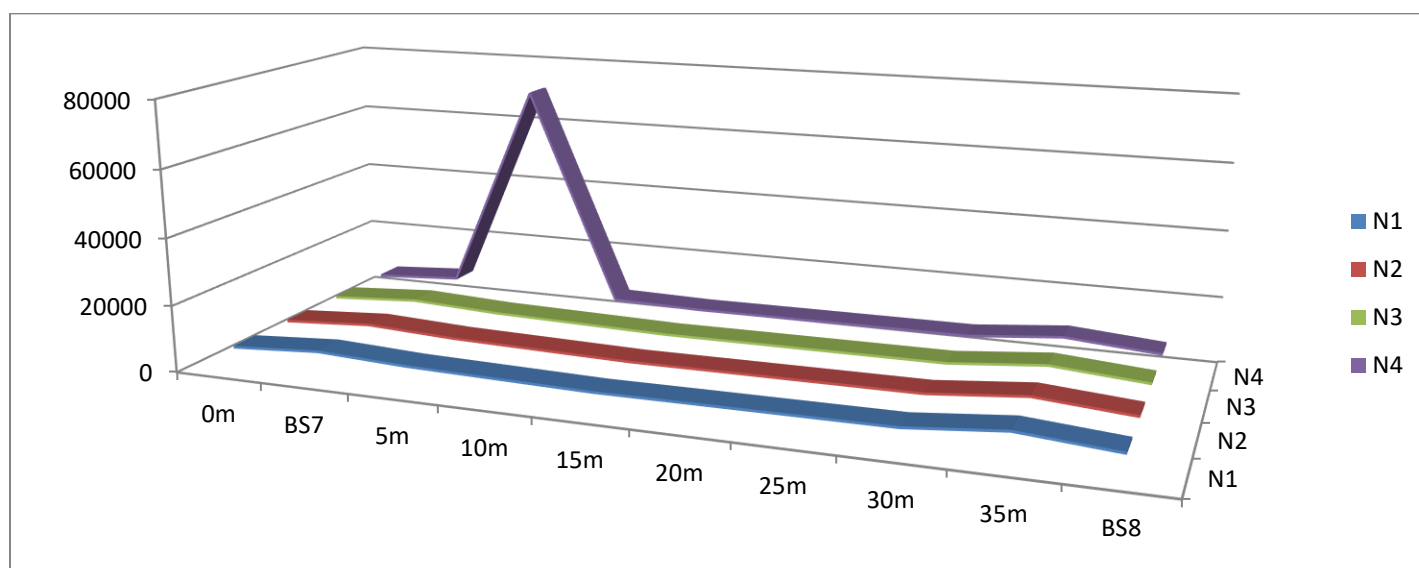


Figure 4.5b: Level of gravity changes in Igbeyin-Adun Area 1 line 5 using 3D lines

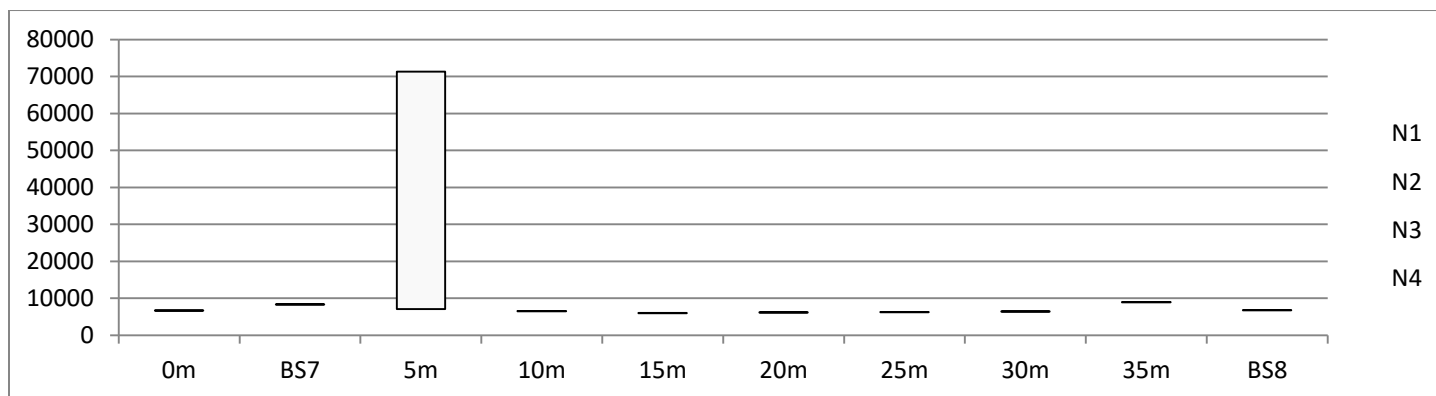


Figure 4.5c: High –Low close Description of gravity changes in Igbeyin-Adun Area 1 line1

4.5.2 Bouguer, Regional and Residual Anomaly Profile in Traverse 4

The gravity profile along the traverse is shown in Figure 4.5d to 4.5f below. A total length of 35 m with station spacing of 5 m was investigated. The bouguer anomaly data is plotted as profile and displayed in Figure 4.5d. Figure 4.5e is the regional residual separation profile with a trend line representing the regional gravity field, and Figure 4.5f is the graph of the residual gravity profile showing the effect of the near-surface geology. The residual profile is interpreted for any gravity anomaly. From the residual anomaly plot, the profile shows major anomalous regions which occur at lateral distance between 1 to 9 m having gravity value of 12200 mGal. This anomalous zone is indicative of high-density body that could represent possible buried utilities (like buried pipe or buried iron) within the study area.

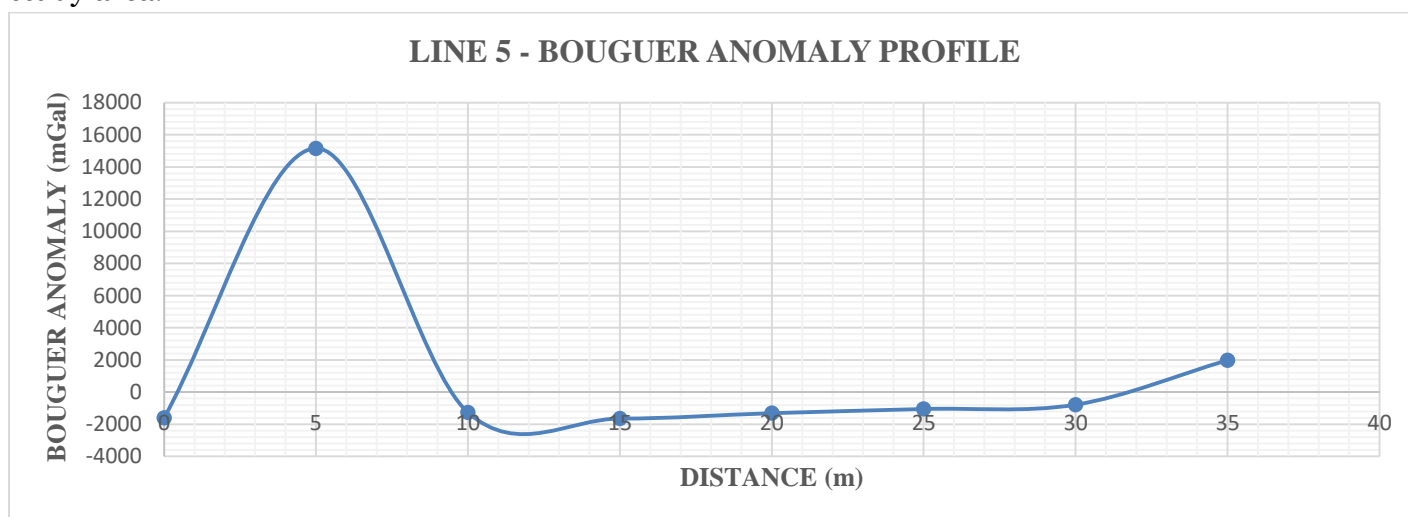


Figure 4.5d: Bouguer Anomaly Profile along Traverse 5

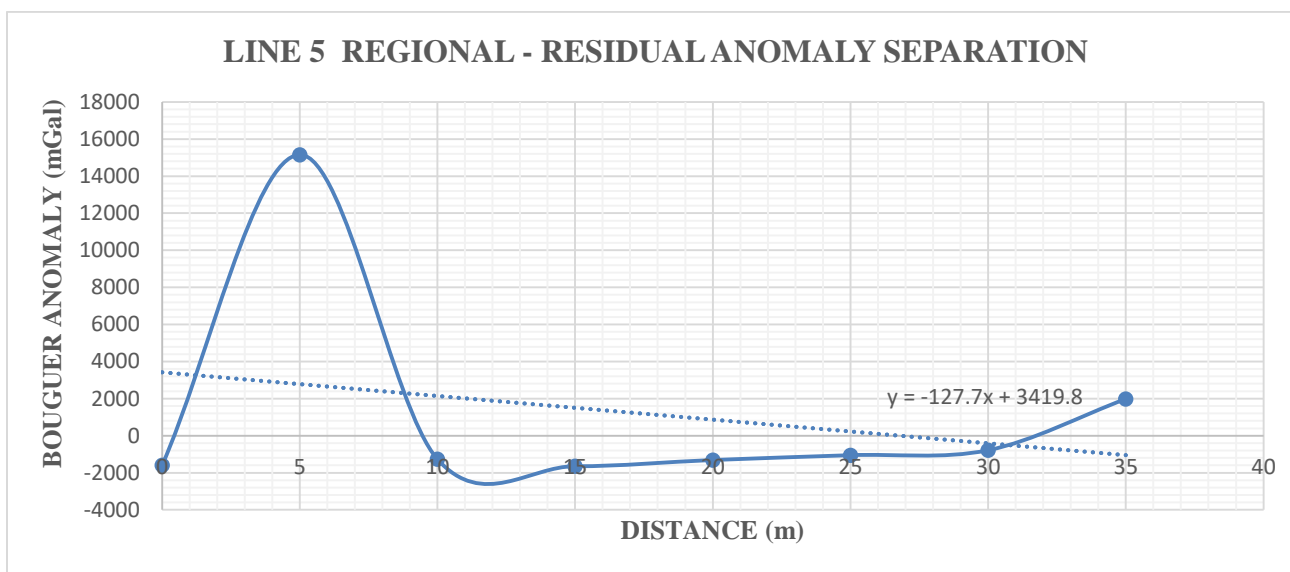


Figure 4.5e: Regional - Residual Anomaly Profile along Traverse 5

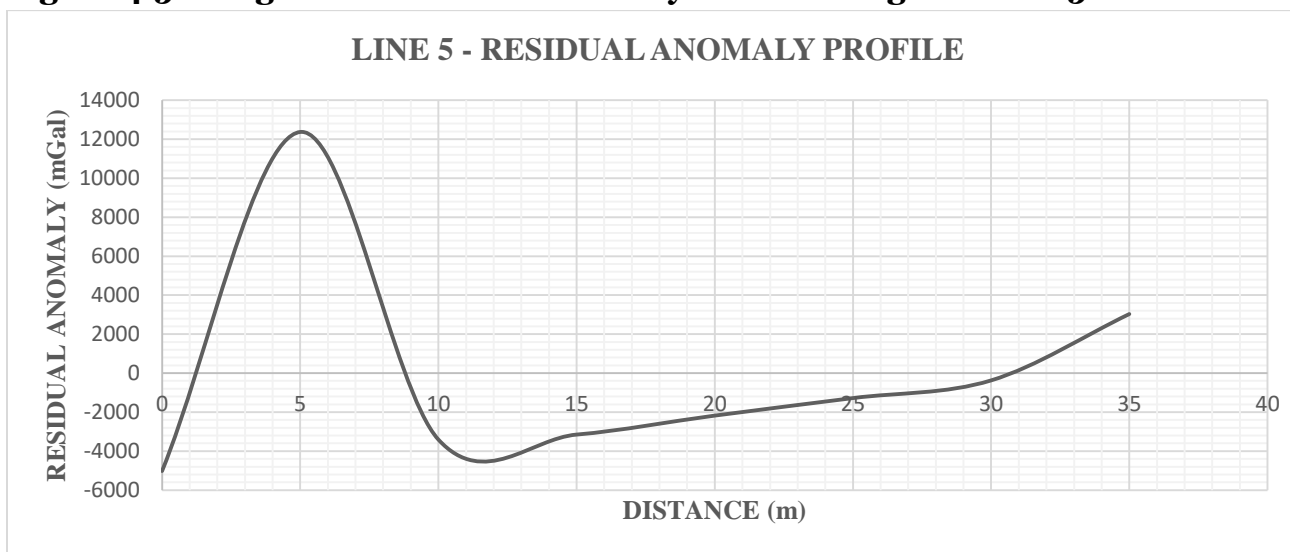


Figure 4.5f: Residual Anomaly Profile along Traverse 5

4.6.1 Description of Gravity Variation in Traverse 6

The variation in gravity values were observed and interpreted using 3D Stacked Column, using 3D lines, High –Low close Description as respectively displayed in figure 4.6a, 4.6b and 4.6c for traverse line 5.

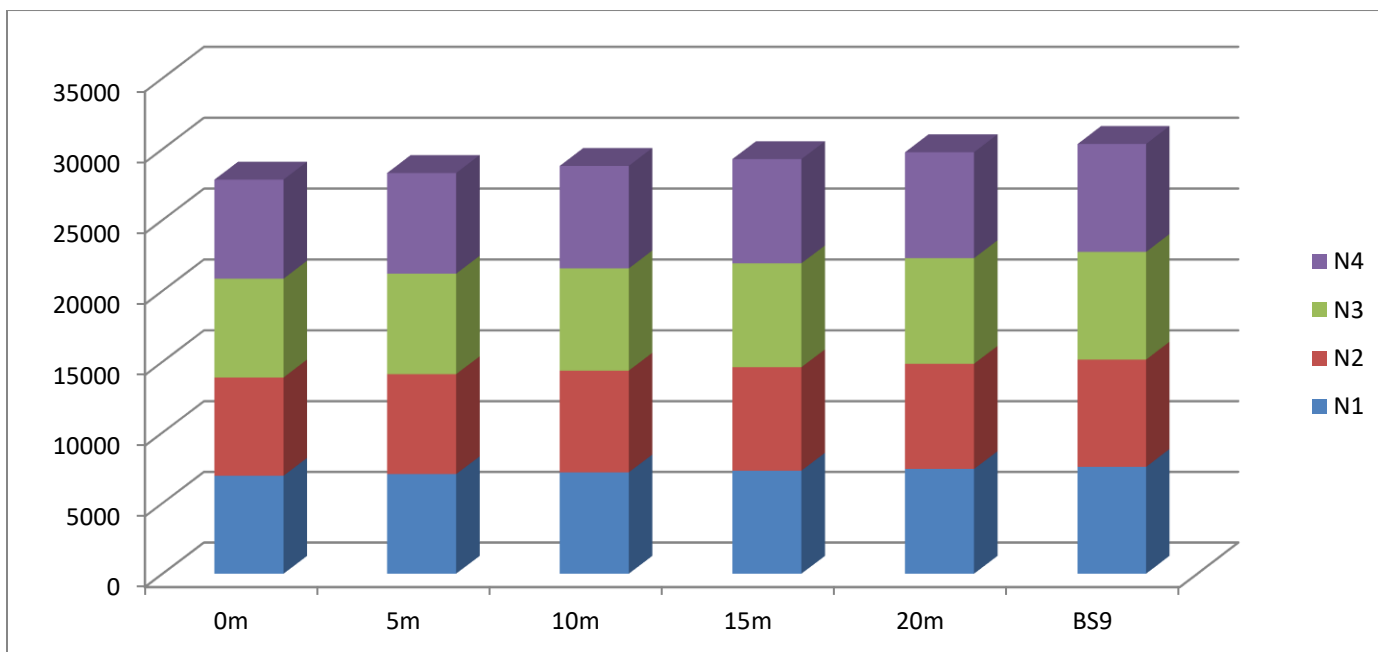


Figure 4.6a: Distribution of gravity changes in Igbeyin-Adun Area 1 line 5 using 3D Stacked Column

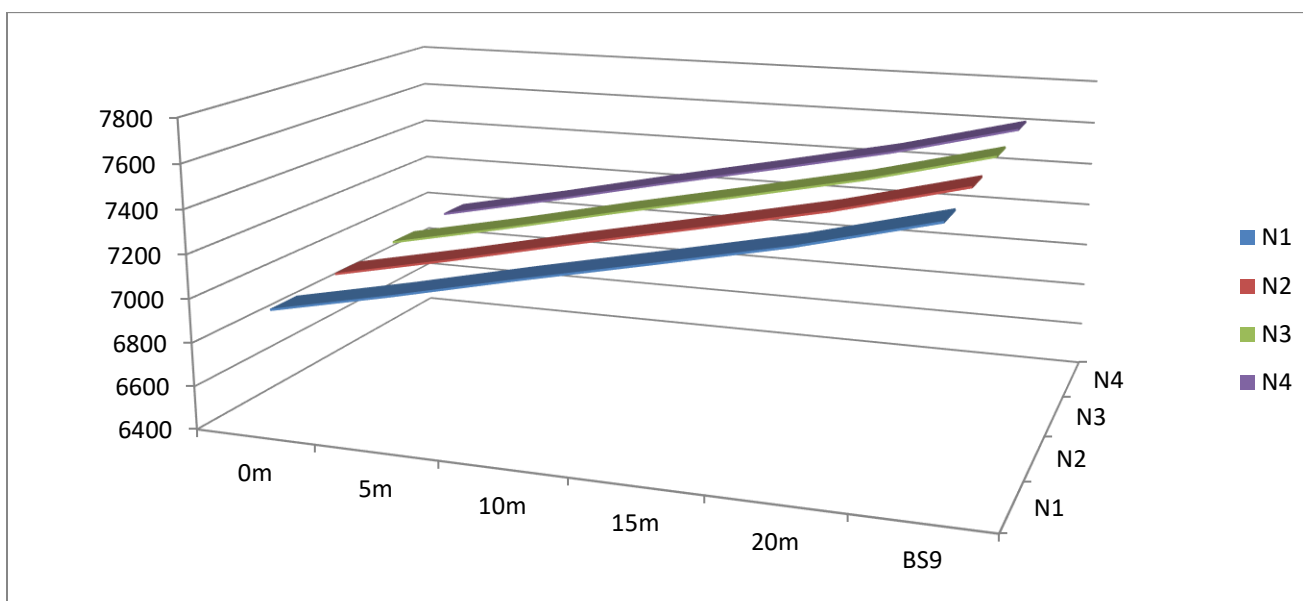


Figure 4.6b: Level of gravity changes in Igbeyin-Adun Area 1 line 5 using 3D lines

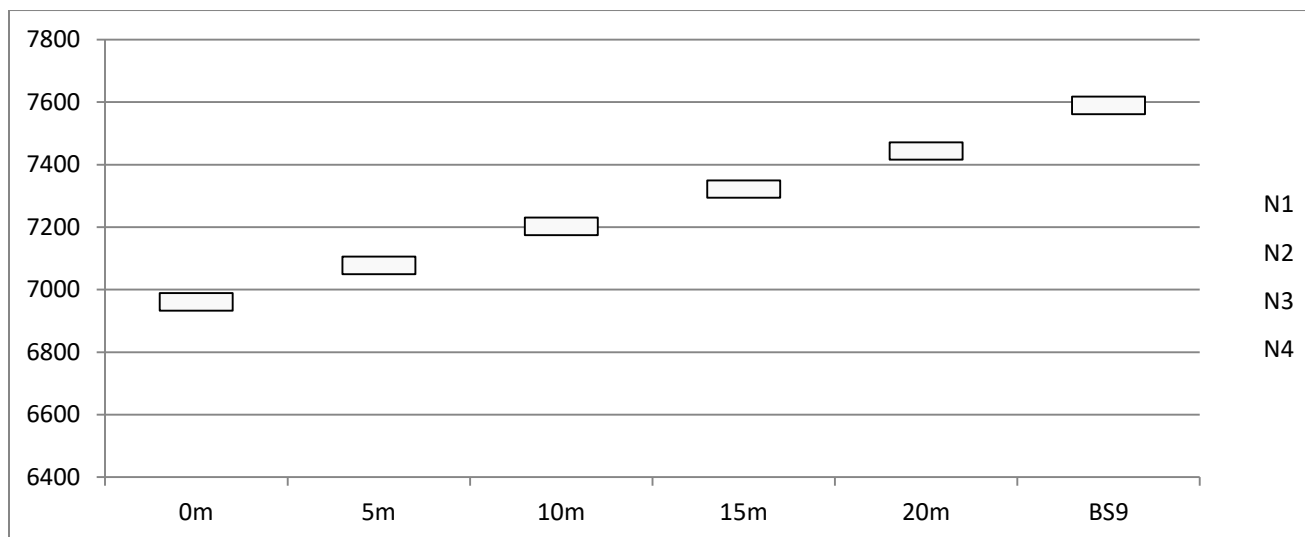


Figure 4.6c: High –Low close Description of gravity changes in Igbeyin-Adun Area 1 line1

4.6.2 Bouguer, Regional and Residual Anomaly Profile in Traverse 6

The gravity profile along the traverse is shown in Figure 4.6d to 4.6f below. A total length of 20m with station spacing of 5 m was investigated. The bouguer anomaly data is plotted as profile and displayed in figure 4.6d. Figure 4.6e is the regional residual separation profile with a trend line representing the regional gravity field, and Figure 4.6f is the graph of the residual gravity profile showing the effect of the near-surface geology. The residual profile is interpreted for any gravity anomaly. From the residual anomaly plot, the profile shows major anomalous regions which occur at lateral distance between 1 to 8.5 m having gravity value of 1.3mGal. This anomalous zone is indicative of high-density body that could represent possible buried utilities (like buried pipe or buried iron) within the study area.

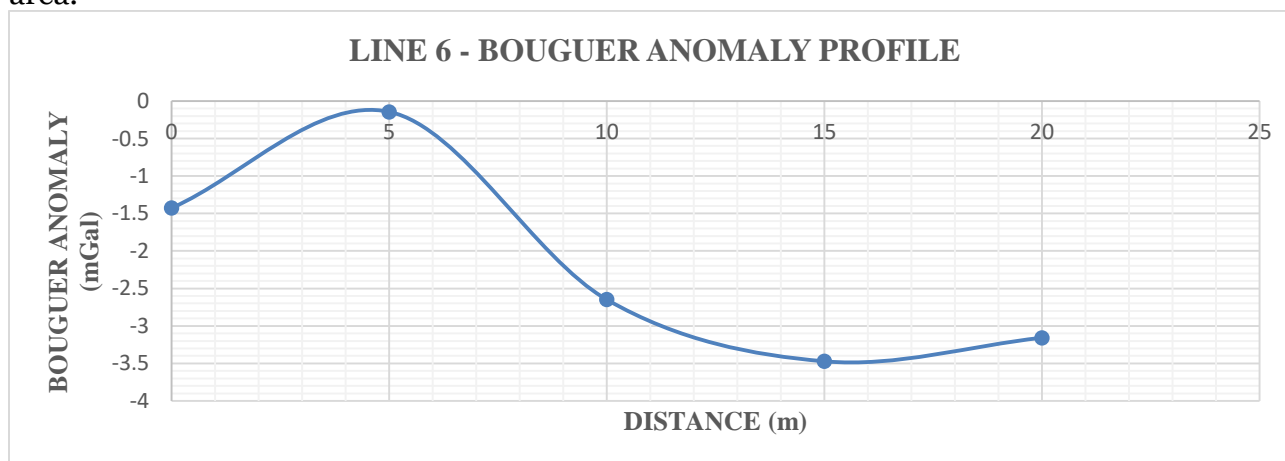


Figure 4.6d: Bouguer Anomaly Profile along Traverse 6

Ishola S. A

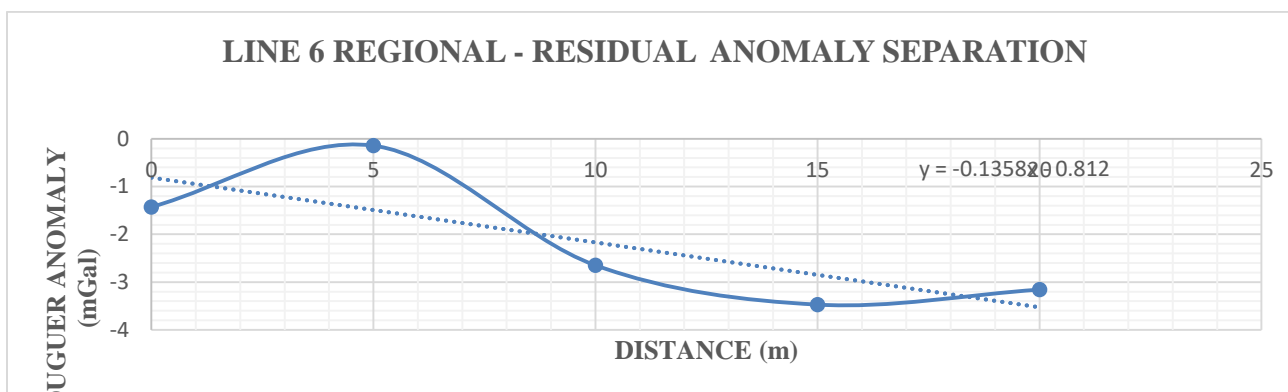


Figure 4.6e: Regional - Residual Anomaly Profile along Traverse 6

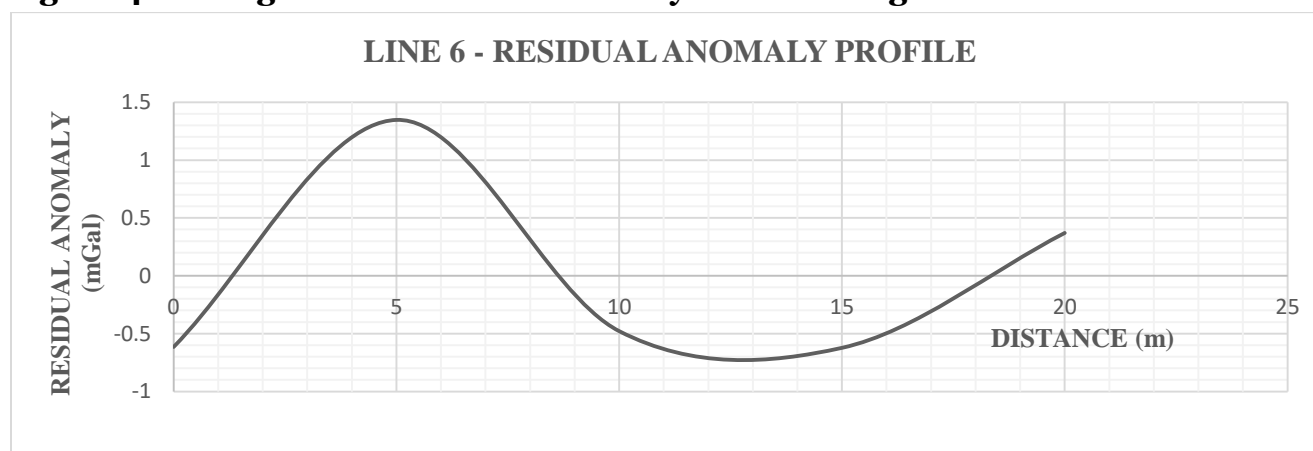


Figure 4.6c: Residual Anomaly Profile along Traverse 6

5.0 Conclusion

CG-5 Autograv meter and other field accessories were used to measure the gravity variation at the location. A base station was established to serve as a reference point due to variations in the earth's gravitational field and to make corrections for drift. Different types of corrections were considered to minimize errors and for effective acquisition and interpretation, the corrections that were observed were drift, terrain, free-air and Bouguer, and tidal

corrections. The gravity survey across the six traverses provided a detailed view of the subsurface anomalies in the Igbeyin-Adun 1 area. Each traverse offered insights into the distribution of density variations and potential subsurface features. The identified anomalies across all traverses point to varying subsurface conditions, including potential buried utilities, geological structures, or objects with differing densities. From the residual anomaly plot, the profile 1 shows major anomalous regions which

Ishola S. A



occur at lateral distance between 5 to 17 m and 17 to 25m having gravity value of 42000 and -30000 mGal respectively. From the residual anomaly plot, the profile 2 shows major anomalous regions which occurred at lateral distance between 22 to 32 m and 32 to 40m having gravity value of 1400 and -1800mGal respectively. From the residual anomaly plot, the profile 3 shows major anomalous regions which occurred at lateral distance between 3.5 to 15 m, 13 to 19m and 22.5 to 35 m having gravity value of -2100, -600 and 1400mGal respectively. From the residual anomaly plot, the profile 4 shows several anomalous regions which occurred along the profile whose gravity values of varies from 700 to 1500mGal. From the residual anomaly plot, the profile 5 shows major anomalous regions which occur at lateral distance between 1 to 9 m having gravity value of 12200mGal. From the residual anomaly plot, the profile 6 shows major anomalous regions which occur at lateral distance between 1 to 8.5 m having gravity value of 1.3mGal. The identified low-density anomalous zones pose serious threats to road construction in the study area. The identified low density anomalous zones in the identified regions could pose a threat to the construction of road within the study area because the gravity anomaly investigation showed that the materials are of low strength which can be improved when subjected to stabilization measures. The implication is that the residual soils within the subsurface of the studied area have low density.

The subsurface materials cannot be used as construction materials except the materials are well compacted and stabilized appropriately in order for void spaces in the soil to be removed; these will intermittently reduce the permeability and increase the strength of the soil materials. It is therefore recommended that the subsurface materials be subjected to compaction and subsequent stabilization process under a standard geotechnical measure in order for it to give rise to the required strength that will withstand the impact of load and impede the inflow of water in the area (Olofinyo *et al.*, 2019; Ayodele, 2009). The identified gravity anomalies warrant further investigation through complementary geophysical methods or direct exploratory drilling to confirm the nature and extent of the identified buried utilities. The variations in gravity values provide a basis for identifying areas of interest for more detailed geological studies. All drilling operations in the area must be properly guided by geophysical surveys. The structural geology of the area must be better understood by integrating other geophysical and geological methods.

References

- Adagunodo, T. A., Sunmonu, L. A., & Momoh, L. O. (2018). A review of the regional geology and geomagnetic field over Nigeria. *Environmental Earth Sciences*, 77(21), 775.
- Adeyemi, G. O. (2013). The influence of parent rock factor on some engineering index properties of three residual lateritic soils



- in southwestern Nigeria. *Bulletin of the International Association of Engineering Geology*, 52, 3-8.
- Adepelumi, A. A., & Olorunfemi, M. O. (2000). Engineering geological and geophysical investigation of the reclaimed Lekki Peninsula, Lagos, Southwestern Nigeria. *Bulletin of Engineering Geology and the Environment*, 58(2), 125-132.
- Aigbedion, I. (2007). Geophysical investigation of road failure using electromagnetic profiles along Opoji, Uwenlenbo and Illeh in Ekpoma-Nigeria. *Middle East Journal of Scientific Research*, 2(3), 111-115.
- Akindele, F. (2015). Importance of road network to social and economic development in Nigeria. *International Journal of Applied Research in Science and Engineering*, 4(6), 13.
- Akpan, O. (2005). Relationship between road pavement failures, engineering indices, and underlying geology in a tropical environment. *Global Journal of Geoscience*, 3(2), 99-108.
- Billman, H. G. (1992). Offshore stratigraphy and paleontology of Dahomey (Benin) Embayment. *NAPE Bulletin*, 70(2), 121-130.
- Durotoye, B. (1975). Quaternary sediments in the Lagos coastal area, Nigeria. *Sedimentary Geology*, 14(1), 191-207.
- Ebuzuone, O. (2015). Evaluating the significance of poor road design as a factor of road failure: A study of Onitsha-Enugu Expressway, Southwestern Nigeria. *Civil and Environmental Research*, 7(2).
- Federal Ministry of Works and Housing (FMWH). (1997). General specifications on roads and bridges. Federal Highway Department, Volume 2, 145-284.
- Federal Republic of Nigeria (FRN). (1992). Highway manual on general specifications requirements for roads and bridges, Clause 6102 and 6122, Vol. 2.
- Gupta, B. I., & Gupta, A. (2003). Roads, railways, bridges, tunnels, and harbor dock engineering (5th ed.). Standard Publishers Distributors.
- Ighodalo, C. A. (2009). Transport infrastructure and economic growth in Nigeria. Revised paper presented at the First International Conference on Transport Infrastructure (ICTI, 2008), Beijing, China, April 24-26, 2008.
- Jegede, G. (1997). Highway pavement failure induced by soil properties along the F209



- highway at Omuoke, Southwestern Nigeria. *Nigerian Journal of Science*, 4.
- Jegede, G. (2000). Effects of soil properties on pavement failures along F209 highway at Ado-Ekiti, Southwestern Nigeria. *Construction and Building Materials*, 14, 311-315.
- Longe, E. O., Malomo, S., & Olorunniwo, M. A. (1987). Hydrogeology of Lagos metropolis. *Journal of African Earth Sciences*, 6(2), 163-174.
- Lowrie, W. (2007). *Fundamentals of geophysics* (2nd ed.). Cambridge University Press.
- Lowrie, W. (2011). *A student's guide to geophysical equations*. Institute of Geophysics, Swiss Federal Institute of Technology Zurich. Cambridge University Press. Retrieved from <https://www.cambridge.org/9781107005846>
- Madedor, A. O. (1992). Common and maintenance problems, causes and possible solutions. *Engineering Focus*, Nigerian Society of Engineering, 4(4).
- Obaje, N. G. (2009). The basement complex. *Geology and Mineral Resources of Nigeria*, 120, 13-30.
- Obaje, N. G., Attah, D. O., Opeloye, S. A., & Moumouni, A. (2006). Geochemical evaluation of the hydrocarbon prospects of sedimentary basins in Northern Nigeria. *Geochemical Journal*, 40(3), 227-243.
- Ogundipe, O. M. (2008). Road pavement failure caused by poor soil properties along Aromoko-Ilesha Highway, Nigeria. *Journal of Engineering and Applied Sciences*, 3(3), 239-241.
- Okpoli, C. C., & Akingboye, A. S. (2019). Application of high-resolution gravity data for litho-structural and depth characterization around Igabi area, Northwestern Nigeria. *NRIAG Journal of Astronomy and Geophysics*, 8(1), 231-241. <https://doi.org/10.1080/20909977.2019.1689629>
- Olofinyo, O. O., Olabode, O. F., & Fatoyinbo, I. O. (2019). Engineering properties of residual soils in part of Southwestern Nigeria: Implication for road foundation. *SN Applied Sciences*, 1, 507. <https://doi.org/10.1007/s42452-019-0515-3>
- Osuolale, O. M., Oseni, A. A., & Sani, I. A. (2012). Investigation of highway pavement failure along Ibadan-Iseyin Road, Oyo State, Nigeria. *International Journal of Engineering Research and Technology*, 1(8), 21.



Owolabi, A. O. (2012). Realistic costing of road construction. Paper presented at the National Seminar of Nigerian Institute of Quantity Surveyor, Ondo State Chapter, 1-17.

Salami, B. M., Falebita, D. E., Fatoba, O. J., & Ajala, M. O. (2012). Integrated geophysical and geotechnical investigation of a bridge site: A case study of swampy/creek environment in SE Lagos, Nigeria. *Ife Journal of Science*, 14(1), 75-82.

Telford, W. M., Geldart, L. P., Sheriff, R. E., & Keys, D. A. (1990). *Applied geophysics* (2nd ed.). Cambridge University Press.